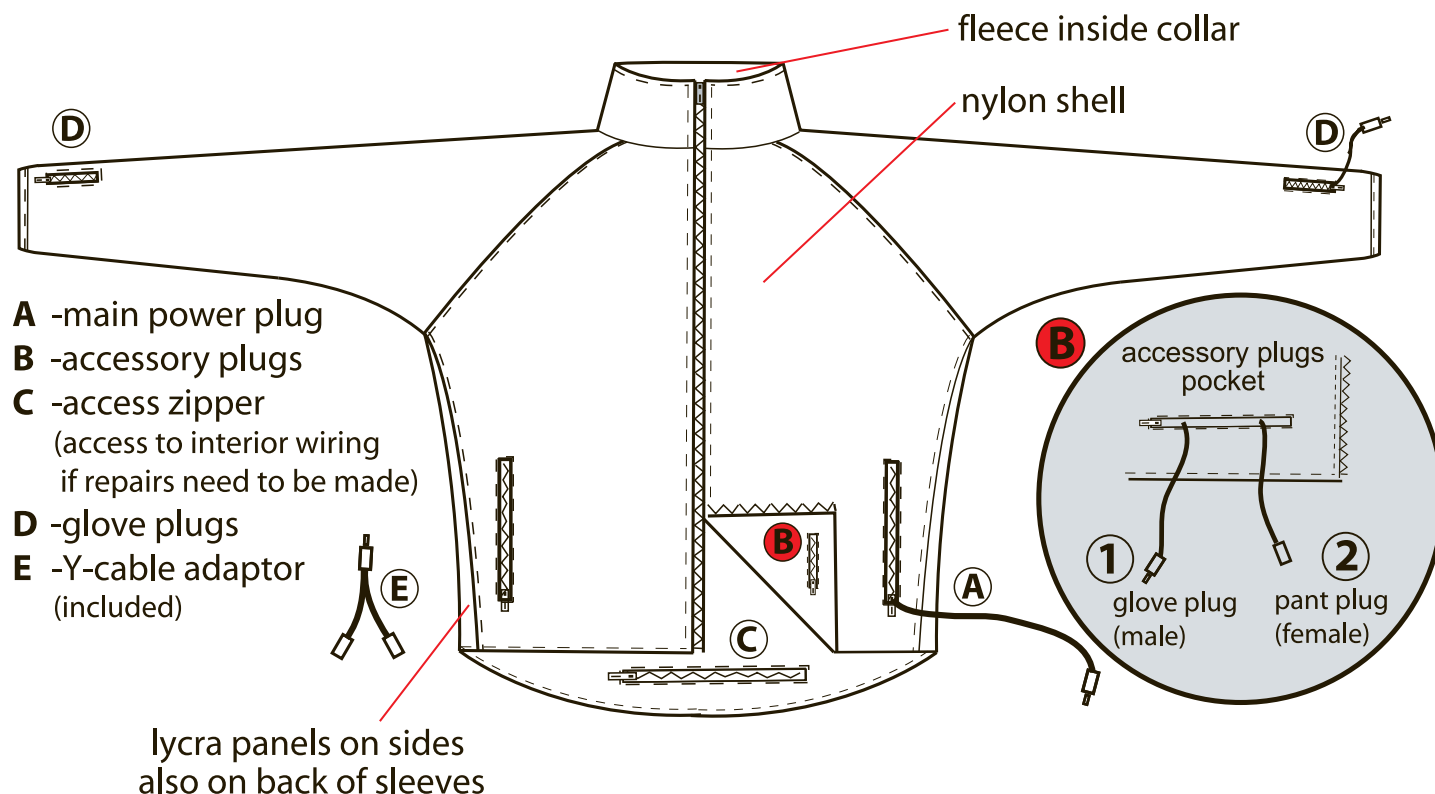


MEN'S WARM & SAFE HEATED JACKET LINER**If using a Single Heat-troller to control jacket or jacket and gloves together:**

Simply plug the cord coming out of the left-hand pocket (A) into the power input cord of a properly installed Heat-troller and feel the heat!

If you will be using heated gloves with a single Heat-troller, plug the gloves into the cords (D) coming out of the zippered sleeve pockets. Both the jacket and gloves will heat.

The two plugs (1 and 2) inside the accessory plug pocket (B)(inside left lining) should be plugged together. If they are not plugged together the gloves will not heat.

If using a Single Heat-troller to control jacket and pants together:

Plug the cord coming out of the left-hand pocket (A) into the power input as above. Unplug the two plugs in the accessory plug pocket. Plug both connectors into the "Y" cable (E) included with your jacket and then plug the pants into the remaining connector.

If using a Dual Heat-troller to control the jacket and gloves separately:

Plug the left-hand pocket cord (A) into one side of a dual Heat-troller. Unplug the two connectors (1 and 2) in the accessory plug pocket and plug the male glove connector (1) into the other power input of the Heat-troller. The other female connector (2) can now be tucked back into it's pocket or plugged into pants which will be controlled by the jacket control.

If using a Dual Heat-troller to control the jacket and pants separately:

Plug the left-hand pocket cord (A) into one side of a dual Heat-troller. Plug the other power input cord of the Heat-troller into the connector coming off your pants.