



YAMAHA '06-'07 & '08-'12 YFZ R6 DIY SADDLE INSTALL

Thank you for purchasing a Zero Gravity saddle. This instruction will give you an in-depth look at the rubber stop transferring process. Please read below. To receive further assistance please go to www.zerogravity-racing.com/seats.php and click onto Installation for quick how to video install.

Helpful hints: Use metric tools, clean hands, put the bike on a stand.

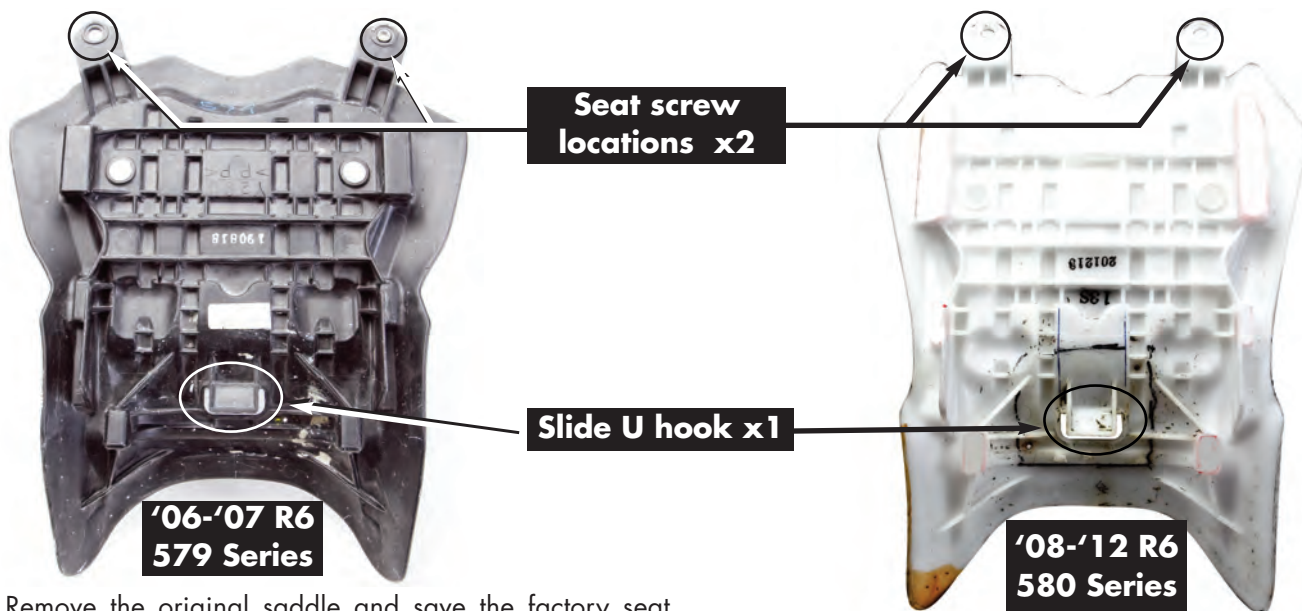

1. Remove the original saddle and save the factory seat screws from your OEM seat.
2. Install Zero Gravity[®] saddle in the same way as a factory seat. Note: The U-hook is hooked in from the back and pushed forward towards the tank.
3. Position your Zero Gravity[®] saddle onto your bike chassis and push into place as you would the OEM seat. Install the original seat screws once the saddle is properly aligned.

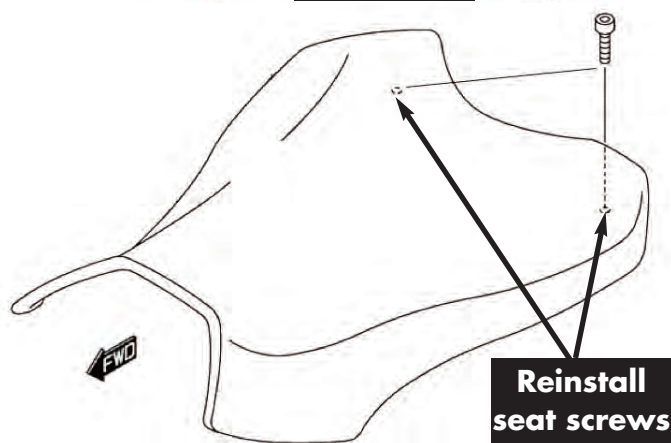

**LATIGO[™]
SERIES**



579 Series



580 Series

TEL: 800-345-9791



FAX: 805-388-8285

912-A PACHO ROAD • GAMARILLO, CA 93012