



Mounting Suggestions

2010 – 2013

Victory Cross Roads® & Cross Country®

One-Piece Seat

Removal of Stock Seat

1. Remove the right and left side covers exposing the seats two 8mm Allen Mounting Bolts.
2. Use a 6mm Allen Wrench and remove the seat's two 8mm Allen bolts.
3. Lift the nose of the seat up and then forward over the gas tank.


8mm Allen Bolt on each side of the frame



Installation of Mustang Seat

The Mustang Seat installs the same way the stock seat is installed.

1. While holding the front of the seat up over the gas tank, align the seat's rear bracket with the hole in the back of the frame. **Be careful not to hit the tank with the front seat's brackets.**
2. Slide the seat back and down into the frame.
3. Align both sides of the seat's U-Bracket with the seat mounting holes in the frame.
4. Install the stock seat's two 8mm Allen Bolts and tighten with a 6mm Allen Wrench.
5. Re-install side covers.

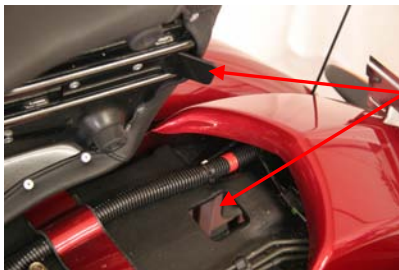

Hole in frame is for the seat's rear bracket



These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under ["Support"](#).

Ref: part #s 76824, 76825, 79566, 79567

