



# INSTALLATION

## LIGHT BAR MOUNTING BRACKET 4008

**FITS: ALL '06-UP VULCAN 900 MODELS, '01-EARLIER HONDA 1100 SPIRIT, KAWASAKI 1500 (CARB ONLY) & 800 CLASSIC**

### PARTS INCLUDED

- 1 Light Bar Mounting Plate
- 1 Light Bar Hardware Kit, Including:
  - 2 M8 x 1.25 x 16MM Socket Head Cap Screws
  - 2 M8 x 1.25 x 16MM Long Button Head Cap Screws (For Vulcan 900 Classic Only)
  - 2 M8 x 1.25 x 23.5MM Hex Spacers
  - 2 M8 Flat Washers
  - 2 M6 Threaded Hex Spacers
  - 2 M6 Flat Washers
  - 2 M6 x 1.0 x 12MM Socket Head Cap Screws
- 1 Installation Instructions

*Please read and understand entire instructions before starting installation.*

### THANK YOU FOR CHOOSING KÜRYAKYN!

**IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.**

**WARNING!** THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

**CAUTION!** This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

**ATTENTION!** This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

### TOOLS SUGGESTED

Set of hex wrenches, and some combination wrenches.

**STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.**

### PROCEDURE

**STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface; turn off the ignition and allow the engine to cool.

**WARNING!** YOU WILL BE WORKING AROUND THE ENGINE AND EXHAUST SYSTEM DURING INSTALLATION. ENSURE THAT THE ENGINE AND EXHAUST SYSTEM HAVE FULLY COOLED TO PREVENT INJURY.

-cont.-

**CUSTOMER SERVICE**  
877.370.3604 (toll free)

**INSTALLATION QUESTIONS**  
techsupport@kuryakyn.com  
or call 715.247.2983

### LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
- The product must be properly installed, maintained and operated under normal conditions.
- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.
- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.
- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.
- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

### ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today—select the "CATALOGS" icon. Each Küryakyn® product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Küryakyn® products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA® All Rights reserved.

kuryakyn.com



**STEP 2** Locate mounting area under the lower triple tree where plate will be installed. See [PIC. 2](#).

**STEP 3** Hold up the mounting plate and determine which mounting holes are correct for your application.

**STEP 4** You may have to remove the hardware on the bottom of the triple tree. Leave the bolts going through the headlight, these will be reused.

**STEP 5** Depending on bike model, use the supplied M6 or M8 threaded hex spacer nuts on the headlight bolts under the lower triple tree for clearance.



**STEP 6** Use the correct Socket Head Cap Screw for your application to secure the mounting plate to the Hex Spacers.

**STEP 7** Make sure all fasteners are tight.

**CAUTION!** Once mounting plate is secure, compress the front suspension to ensure proper clearance between the mounting plate and front fender.

**ATTENTION!** It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

**NOTE:** Two additional bolts (M8 x 1.25 x 16MM) are included for installation on the Vulcan 900 Classic with fork tins. These two bolts are used if the turn signals are removed. The provided bolts go in place of the hardware that was removed in the fork tins.

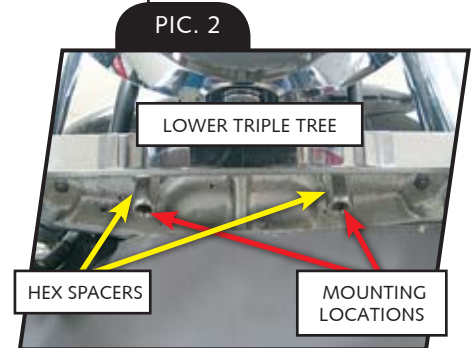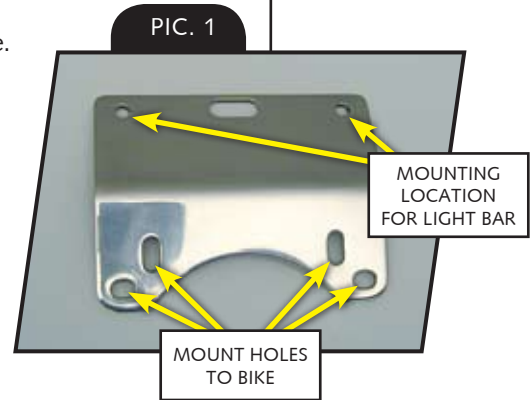

*Ride On!*