



D30  
The Lab  
7-8 Commerce Way  
CROYDON  
CR0 4XA  
+44 (0) 1273 418 600  
+44 (0) 1273 425 459

# D30® T5 EVO PRO X RANGE

**D30® unique patented technology provides both enhanced protection and a versatile, flexible material for a host of shock absorption and impact protection applications.**

The D30® T5 EVO Pro X Range utilises the latest material innovation from D30 which offers increased durability.

The D30® EVO Pro X parts offer greater impact protection than the D30® EVO X range and Area B coverage. They are CE certified to level 2 across ambient, wet and cold conditions.

- Manufactured in a highly durable material
- CE certified to EN1621-1:2012
- Level 2 in ambient, wet and cold conditions
- Area B coverage
- Temperature stable
- Non-toxic

## D30® T5 EVO PRO X RANGE



ELBOW



KNEE



HIP



SHOULDER

D30 XT<sub>i</sub>

### PAD EXPLODED VIEW



PADS INTEGRATED INSIDE TROUSERS AND JACKET

### FLEXIBILITY FEATURE FOR ADDED COMFORT



### IMPROVED VENTILATION FOR SUPERIOR BREATHABILITY




### TAPERED EDGES FOR BETTER INTEGRATION





# D30® T5 EVO PRO X RANGE

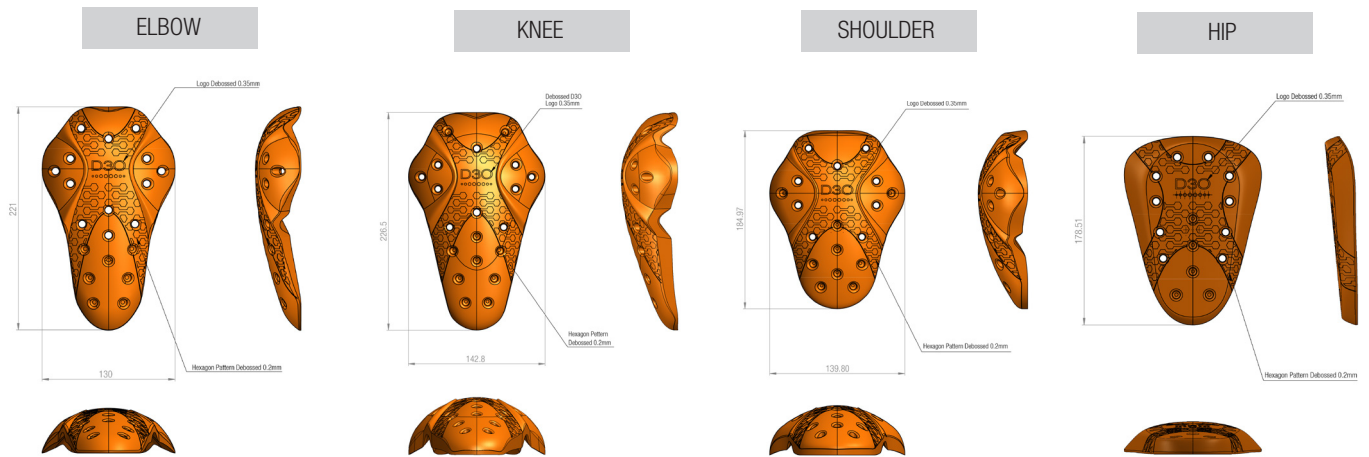

## D30® T5 EVO Pro X range - physical properties

Name	D30® T5 EVO Pro X Elbow	D30® T5 EVO Pro X Knee	D30® T5 EVO Pro X Shoulder	D30® T5 EVO Pro X Hip
Code	11057	11059	11055	11061
Dimensions (mm)	221 x 130	227 x 143	185 x 140	178 x 130
Thickness (mm)	14	14	14	14
Weight (g)	133	159	135	108
Hardness (Shore 00)	78	78	78	78
Volume (cm³)	258	308.3	262.7	209

Values shown represent typical physical properties.  
For full details, please request SOQ document from D30 representative.  
For general material data, please visit the website: [www.D30.com](http://www.D30.com)

## D30® T5 EVO X Pro Range - Tested to EN1621-2 LOWER VALUE = BETTER PROTECTION

