



2011-13 ZX10R Tag Bracket Instructions


HOTBODIES RACING RECOMMENDS THAT YOU HAVE A PROFESSIONAL MECHANIC PERFORM THIS INSTALLATION. IF YOU CHOOSE TO "DO-IT-YOURSELF" ALWAYS TAKE APPROPRIATE SAFETY MEASURES WHEN INSTALLING THIS PRODUCT. CAREFULLY READ ALL INSTRUCTIONS BEFORE BEGINNING THE INSTALLATION PROCESS! WHEN IN DOUBT, CALL US! TOLL FREE 800-555-2805

Parts List:


- 1 Main tag bracket w/LED light in it
- 1 Right side signal bracket
- 1 Left side signal bracket
- 2 Blue self stripping electrical taps
- 2 Zinc washer lock nuts (MC-90533A126)

Tools List:

- 4mm allen wrench
- 5mm allen wrench
- Wire cutter and pliers

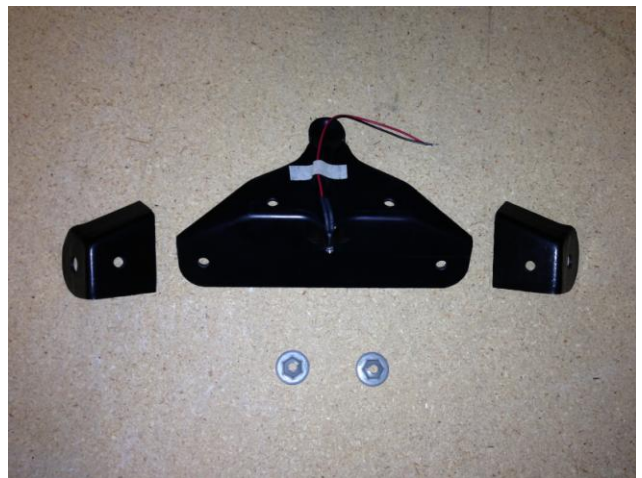

*Note: Blue self stripping electrical taps not shown *

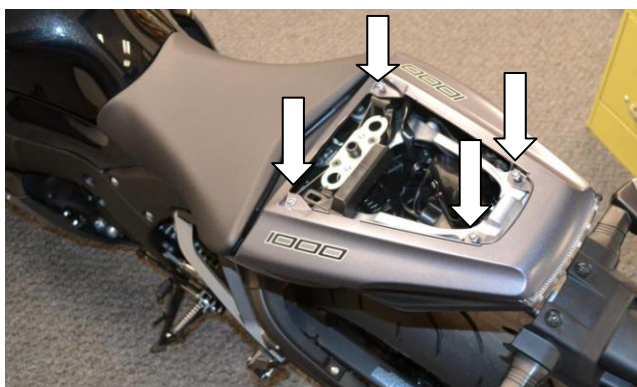


1) Remove stock passenger seat and remove the 4 4mm allen bolts holding tail section on. Slide tail section backwards and up to remove.




2) Disconnect the electrical connectors for the turn signals, license plate light, and tail light.

READ CAREFULLY BEFORE INSTALLATION! This undertail like all undertails has been designed for off road racing use only, and has not been presented for D.O.T. certification! Hotbodies Racing Inc., our distributors, and our dealers will NOT be responsible for the use or misuse of this product. Always check with your local Department of Motor Vehicles before modifying any aspect of your motorcycle.

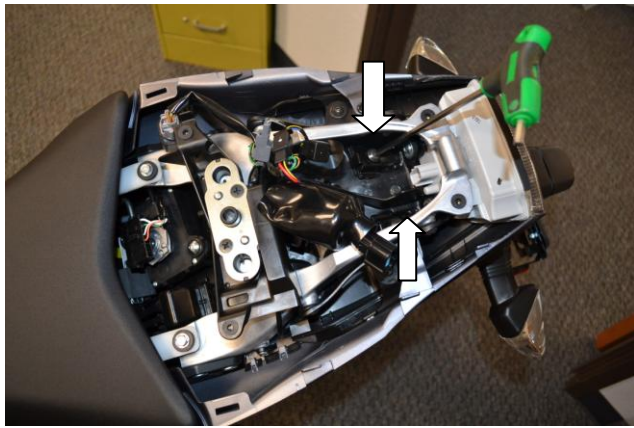

3a) Unbolt the 2 5mm allen bolts located on the inside of your glove box holding on your stock mud-flap. See close up picture on 3b for reference.

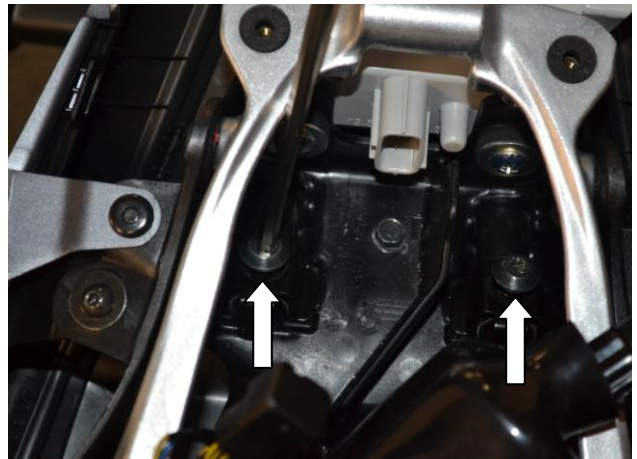

3b) Remove these two bolts and the brackets that they are holding on.



4) Gently remove the stock mud-flap assembly by pulling it out. Be careful feeding wires through the holes in the stock pieces.

5) Prepare new Tag for installation. Wire stock connector to new license plate light using the 2 blue wiring taps.

Tag Bracket:


- Red = Positive, Black = Negative

Stock Connector:

- Red = Positive, Black/Yellow = Negative



6a) Now that your Tag Bracket is ready for installation, feed the new wires through the existing holes for the plate light wires and insert front tip first then lift up into place.

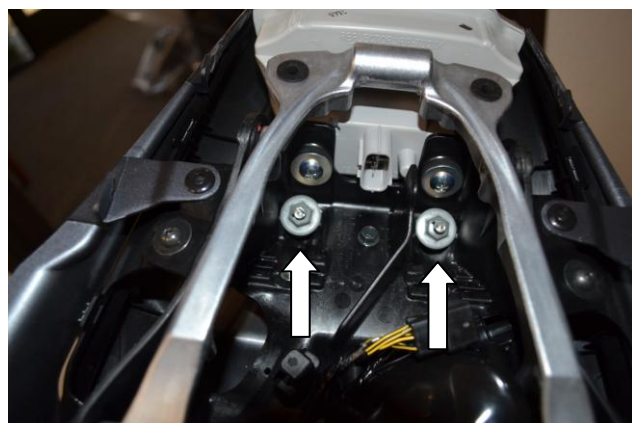

6b) Secure tag using the 2 stock 5mm allen bolts & the 2 locking washers provided. *Note bolts will bolt from the bottom upwards. DO NOT OVERTIGHTEN!

7) Your done! If you notice a very small area where the tag bracket does not cover the very back of the original mud flap holes on the stock undertail, this is completely normal and will barely be seen from directly underneath the bike. It is about as big as the tip of the pen. See the figure to the right to see example.

*Note if you are using the turn signal brackets they will only work with aftermarket short stalk style turn signals. Fasten brackets using the license plate mounting bolts going through the license plate, then through the tag bracket, then through the brackets.

