
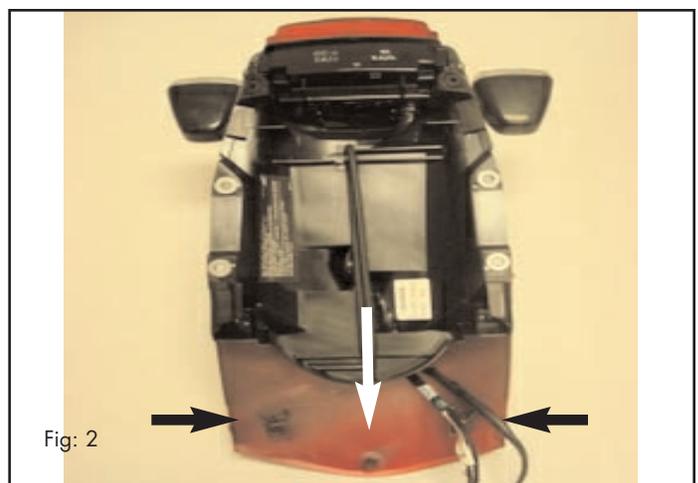



HOTBODIES RACING.COM

08' CBR1000RR Undertail

HOTBODIES RACING RECOMMENDS THAT YOU HAVE A PROFESSIONAL MECHANIC PERFORM THIS INSTALLATION. IF YOU CHOOSE TO "DO-IT-YOURSELF" ALWAYS TAKE APPROPRIATE SAFETY MEASURES WHEN INSTALLING THIS PRODUCT AND USE SAFETY GOGGLES AND LEATHER GLOVES. CAREFULLY READ ALL INSTRUCTIONS BEFORE BEGINNING THE INSTALLATION PROCESS! HOTBODIES RACING WILL NOT REPLACE YOUR STOCK GLOVE-BOX FOR ANY REASON, MEASURE TWICE AND CUT ONCE!

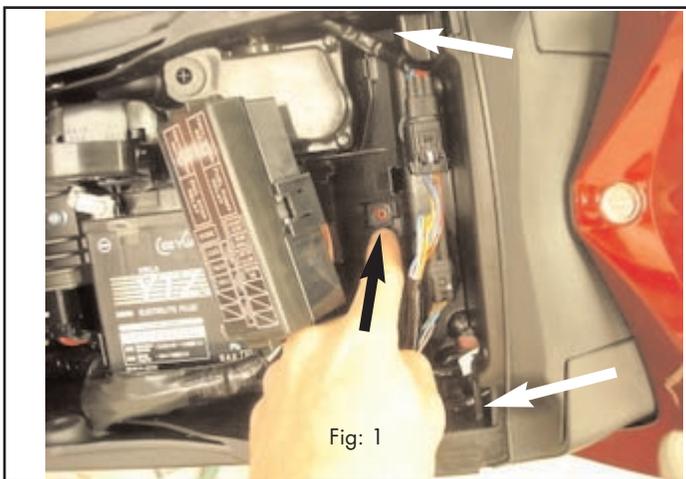

1) First remove both seats, then to remove tail section lift up fuse/relay box and remove phillips head bolt hidden underneath. Remove the remaining bolts and mudflap bolts, entire mudflap/undertail and tail section will all come off as one piece (as seen in Fig: 2). Note: There are two more hidden bolts located between battery box and OEM undertail to the sides of the bolt removed in the first pic (additional arrows in Fig: 1). They are very hard to remove, but are necessary for removal of OEM parts.

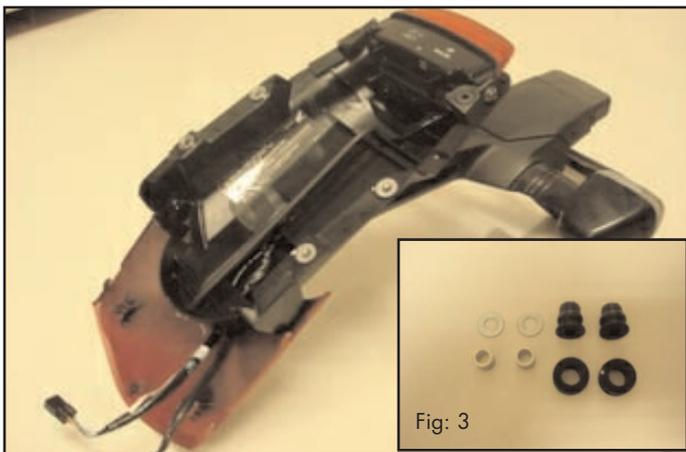

2) Remove tail light held on by 2 phillip screws from OEM undertail. Remove 2 well nuts and 2 rubber gromets from OEM undertail to be re-used with new undertail (as seen in Fig: 3).



3) Trim inner plastic lip off of inside right and left sides of the tail section. Trim the plastic off and make the lip smooth with the surrounding plastic. You can test fit the new undertail and tail section while off the bike to ensure a good snug fit.

READ CAREFULLY BEFORE INSTALLATION! This undertail like all undertails has been designed for off road racing use only, and has not been presented for D.O.T. certification! Hotbodies Racing Inc., our distributors, and our dealers will NOT be responsible for the use or misuse of this product. Always check with your local Department of Motor Vehicles before modifying any aspect of your motorcycle.




4) Assemble white plastic brackets (provided) with hardware from step 2; Fig: 1.



5) Assemble brackets to tail light and then assemble tail light to tail section making sure tail light is securely mounted.



6) Re-install tail section, using stock hardware. Under fuse box drill out mounting hole big enough to install rubber well nut that is provided with the kit.

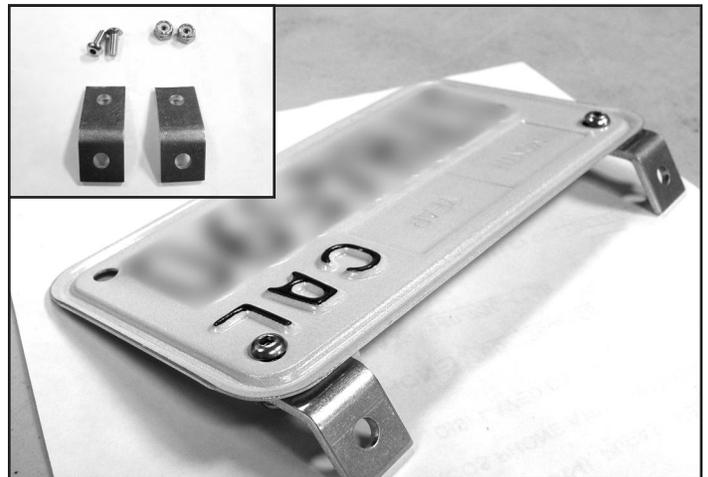

7) *Install license plate brackets to back side of license plate as shown. Now hold license plate in desired location on undertail, carefully mark and drill holes, install using the two (2) sets of allen bolts and lock nuts.



8) Slide undertail into tail section one side at a time, tail section should wrap around undertail and hold it securely. Phillips head screw that is provided will mount at the bottom of undertail in to well nut, from step 7. You're done!

WIRING INSTRUCTIONS:

Connect the right (blue wire) and left signal (orange wire) wires on the bike, to the respective right/left red wires on the undertail. Connect the ground wires (green) to the black wires on the undertail. The license plate light wire is brown w/white tracer, connects to the red wire of the undertail. Your done!