



Mounting Suggestions: Honda VLX 600 Shadow 1999-09 One-Piece Seat

Baseplate Features:

The one-piece, marine-grade fiberglass baseplate is a direct replacement for the stock baseplate. Rubber bumpers are positioned to prevent the seat from touching the frame and fender.




Stock Seat Removal Steps

Step 1- Remove 6 mm mounting bolt on each side.




Step 2- Slide seat back then up to remove.

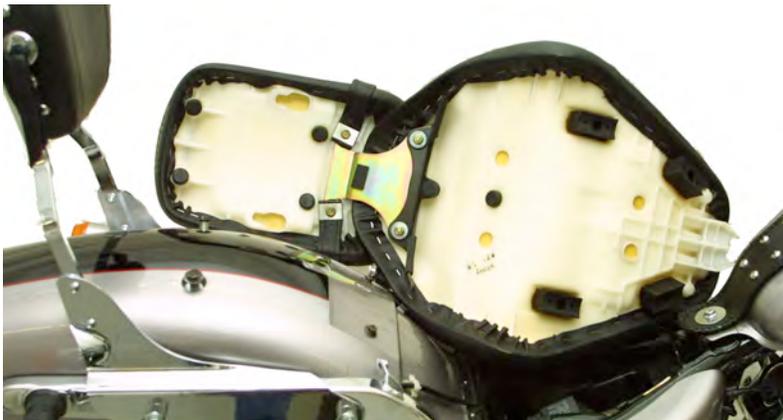


Mounting Suggestions: VLX 600 Shadow 1999-09 One-Piece Seat

Mounting of Mustang Seat

Step 1- Slide tongue at seat nose under formed tunnel in frame behind fuel tank (See arrow)

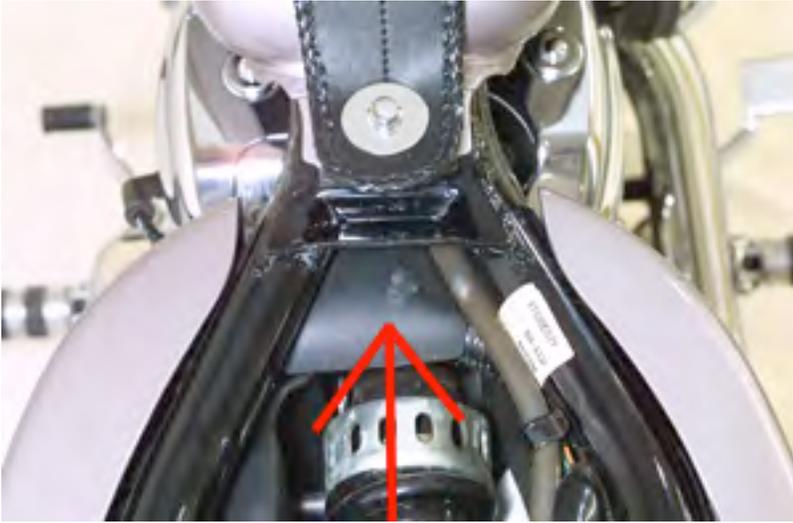

Step 2- Make sure rear fork brackets slide under studs in fender

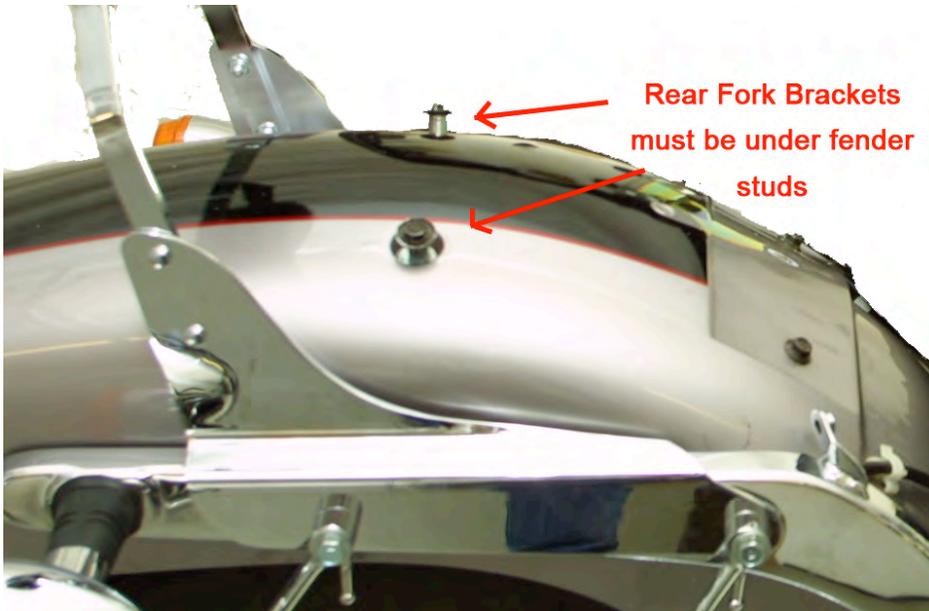

steps continued on next page

Mounting Suggestions: VLX 600 Shadow 1999-09 One-Piece Seat

Mounting of Mustang Seat cont'd

Step 3- Push seat forward about 1/4". Install a bolt on one side, leaving a little loose, then go to the other side and install that bolt.



Step 4- Tighten the bolts evenly, a little on one side then the other. If one bolt is completely tightened first, it will cock the seat to one side making the other bolt hard to install. A 1/4" space between the side brackets and the frame is needed to put pressure on the nose bracket as the screws are tightened. *Important: The seat centers itself on the fuel tank, not the side covers- the left side cover is 1/2" to 5/8" wider.*



Enjoy the Comfort of your new Mustang Seat!

These steps are guidelines to help you install your new Mustang product. If you need further assistance please call us at 800-243-1392, Monday through Friday 9:00 - 5:30 Eastern or send an e-mail to questions@mustangseats.com or visit our website at www.mustangseats.com.

For care and maintenance of our seats, please go to our website under "Support".

Ref part #75793, 75794