



INSTALLATION

FOLDING Sissy BAR LUGGAGE RACK 1558

FITS: '84-UP SOFTAIL (EX. FXSTD, '06-UP FXST/B/C/S, '07-UP FLSTF), '06-UP DYNA AND '04-UP XL WITH DETACHABLE SIDE PLATES

PARTS INCLUDED

- 1 Folding Luggage Rack Assembly
- 1 Hardware Kit, including:
 - 2 1/4-20 x 7/8 Button Socket Cap Screw (BSCS)
 - 2 1/4 Flat Washer
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

CAUTION! This indication alerts you to the fact that ignoring the contents described herein can result in potential injury or material damage.

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of hex wrenches

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

PROCEDURE


STEP 1 Park the motorcycle on a hard, level surface; turn off the ignition.

CAUTION! Avoid damage to the motorcycle. Protect painted surfaces with a soft cloth or blanket.

STEP 2 Remove the screw shown in PIC.1 from both of the sideplates; set the screws aside, they will not be re-used.

-cont.-

PIC.1

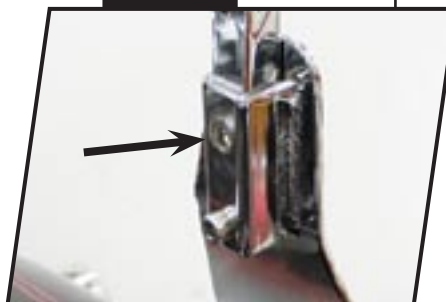

CUSTOMER SERVICE

877.370.3604 (toll free)

INSTALLATION QUESTIONS

techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Küryakyn warrants that any Küryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Küryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).

- The product must be properly installed, maintained and operated under normal conditions.

- Küryakyn makes no warranty, expressed or implied, with respect to any gold plated products.

- Küryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Küryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Küryakyn and a customer.

- Küryakyn products are often intended for use in specific applications. Küryakyn makes no warranty if a Küryakyn product is used in applications other than intended.

- Küryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. Components of Küryakyn products containing L.E.D.s will be warranted for defects in materials and workmanship for 3 years from the date of purchase.

- Küryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Küryakyn. Küryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

You'll find all our innovations for H-D, GL and Metric Cruisers in our annual catalogs. Order online today-select the "CATALOGS" icon. Each Küryakyn product comes with a Proof-of-Purchase good for a complimentary catalog. Details in packaging.

Be sure to ask your local dealer about other Küryakyn products, the motorcycle parts and accessories designed for riders by riders.

©2005 Küryakyn USA All Rights reserved.



STEP 3 Position the Folding Sissy Bar Luggage Rack over the bottom screws in the sideplates. See PIC.2.

STEP 4 Align the holes in the Folding Luggage Rack with the threaded holes in the sideplates; loosely secure the rack to the sideplates with the two included 1/4 flat washers and 1/4-20 BSCS. See PIC.3.

STEP 5 Flip the luggage rack up so that the magnets secure it to the back of the sissy bar; align the luggage rack and the sissy bar and then tighten the two 1/4-20 screws from STEP 4.

STEP 6 Ensure proper clearance and operation before riding the motorcycle.


ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

CAUTION! Never exceed the manufacturer's recommended load capacity. Excess loading on the luggage rack could cause damage to your motorcycle, loss or injury. Küryakyn is not responsible for damage, loss or injury caused by exceeding the manufacturer's load capacity.


Ride On!

Küryakyn

PIC.2

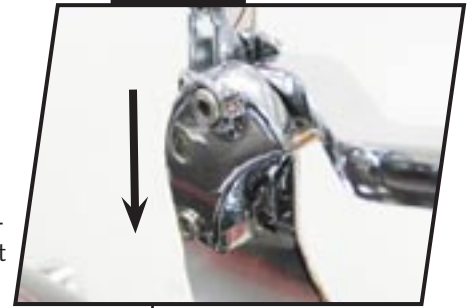

PIC.3

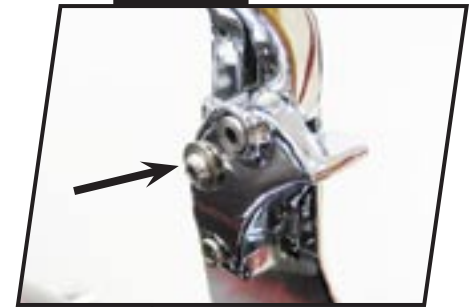

PAGE

2

FOLDING SISSY BAR INSTALLATION