

RS628K INSTRUCTIONS


TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY


BRAKE SIDE EXPLODED VIEW


FOR: Yamaha R3 15-16



INDEX

-  Lubricate
-  Thread Lock
-  Use Factory Piece

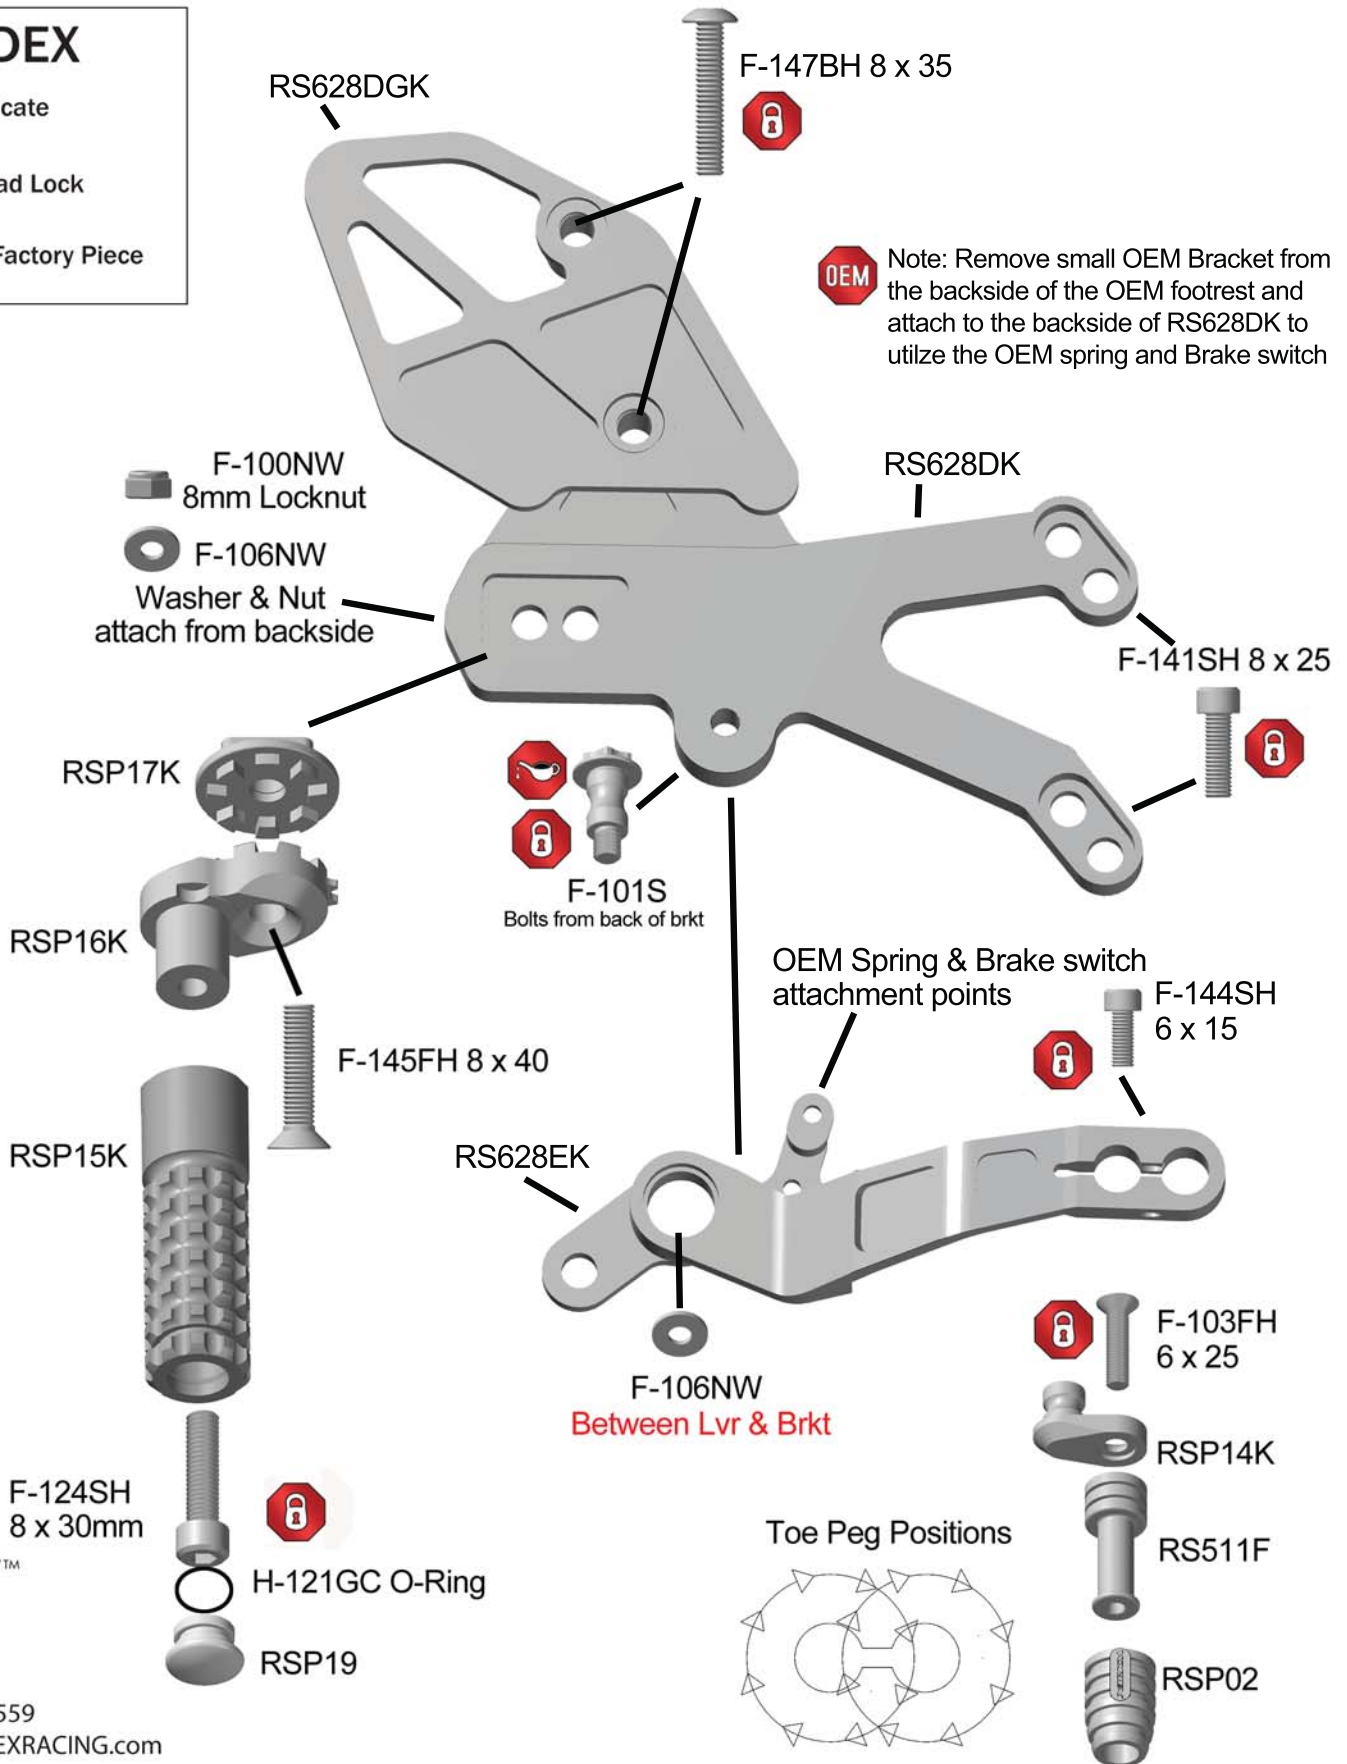

 Note: Remove small OEM Bracket from the backside of the OEM footrest and attach to the backside of RS628DK to utilize the OEM spring and Brake switch



RS628K INSTRUCTIONS

TO BE INSTALLED BY A CERTIFIED MECHANIC ONLY | FOR RACE USE ONLY


SHIFT SIDE EXPLODED VIEW

FOR: Yamaha R3 15-16




INDEX

-  Lubricate
-  Thread Lock
-  Use Factory Piece

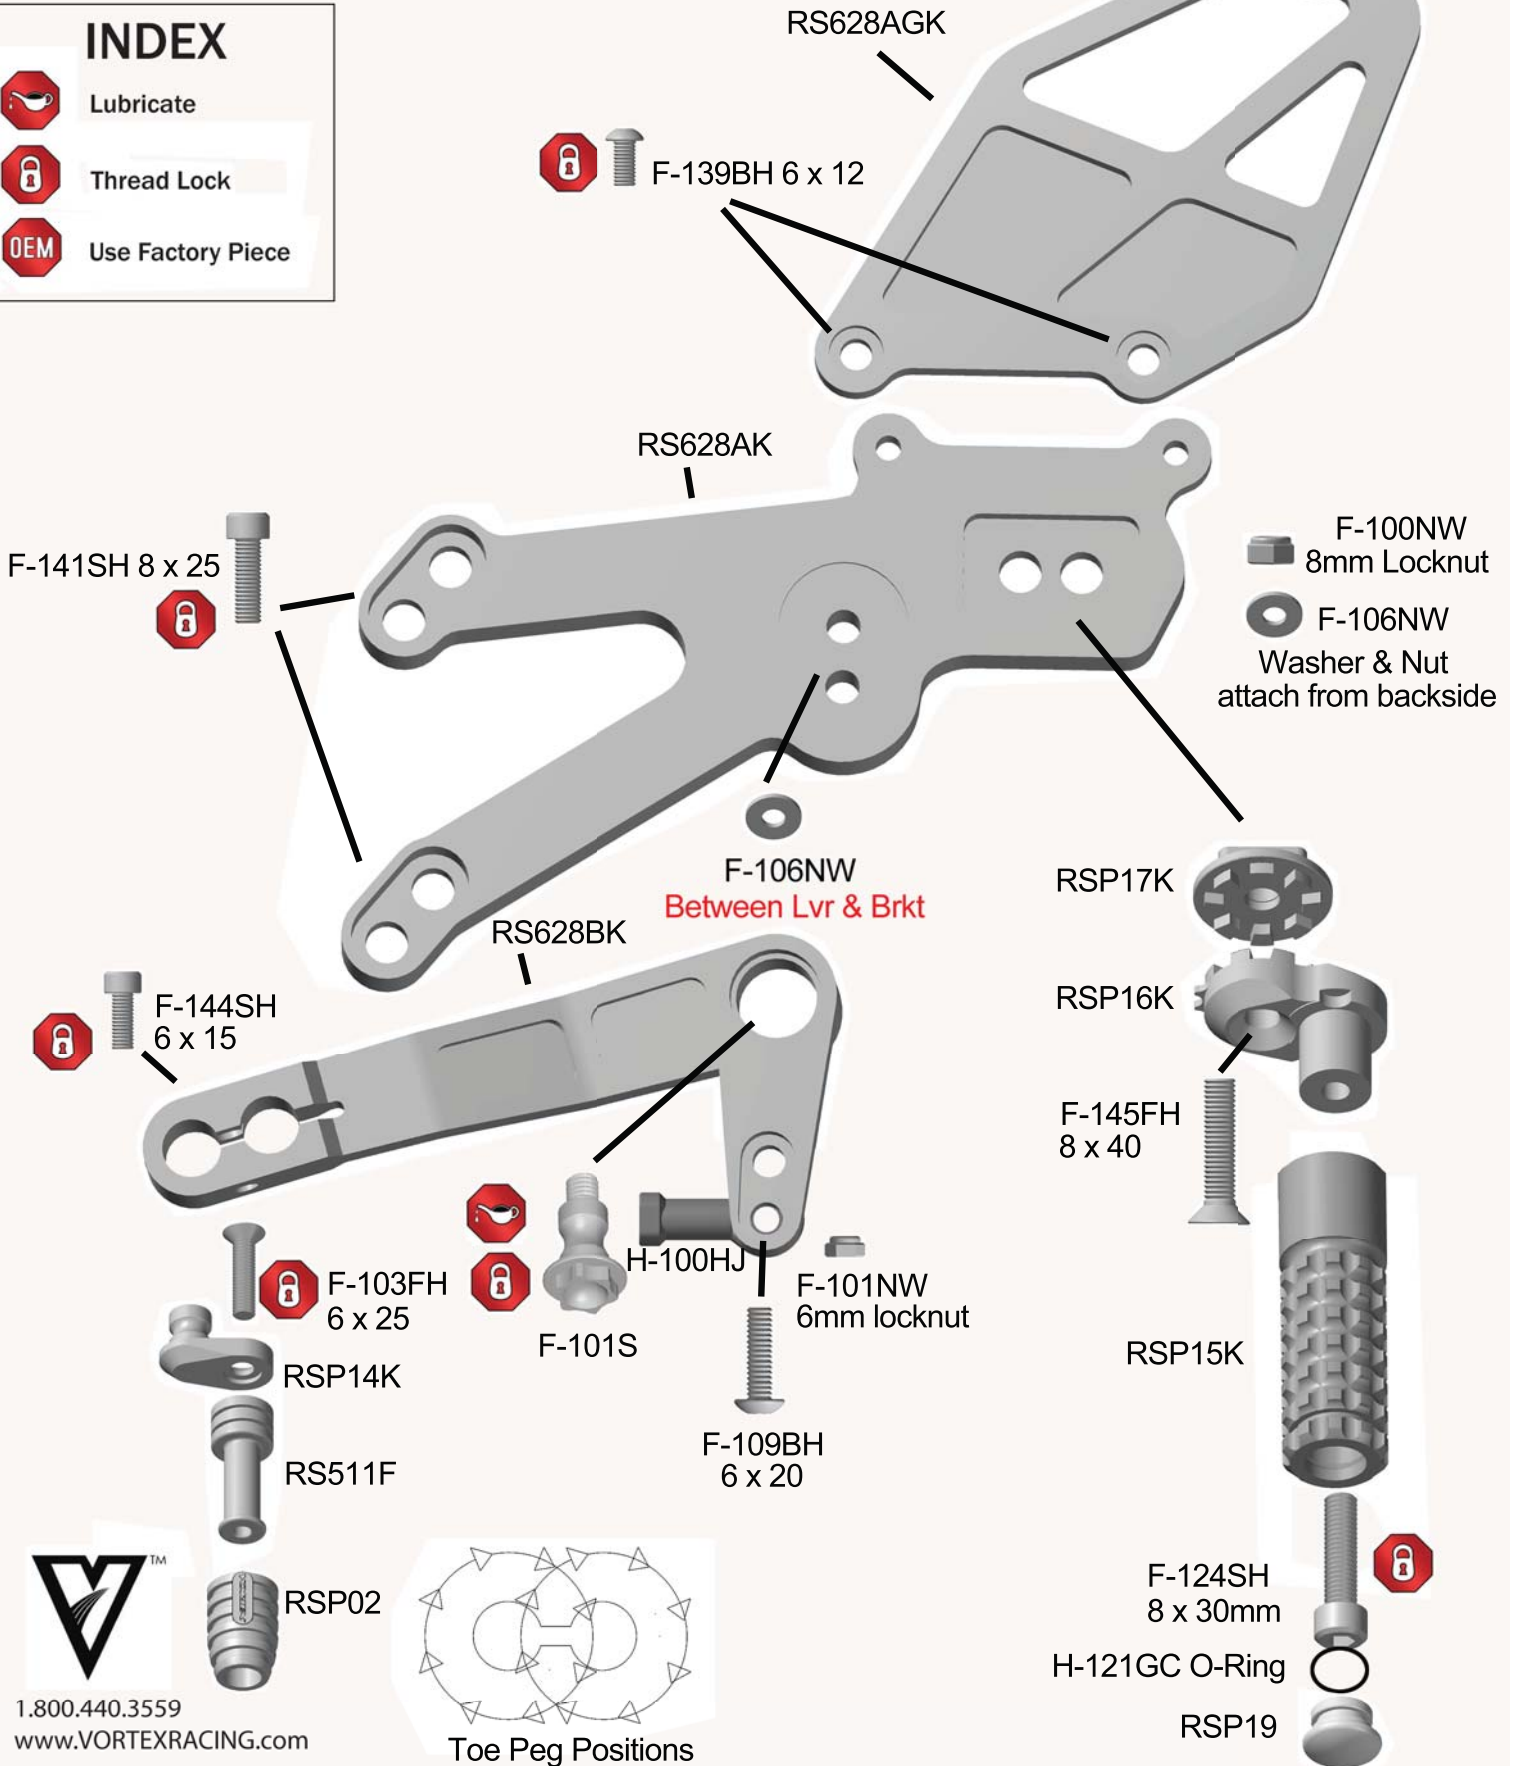

1.800.440.3559
www.VORTEXRACING.com



Toe Peg Positions