

Kawasaki

Assembly Instructions

Model:	EX250P/S/T/V, EX400G/H
Description:	Pad (Fuel Tank)
Part Number:	99994-1039
Flat Rate Time(Hr):	0.1


Before you begin, read through these instructions and check that all parts are present. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.

Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.

The following symbol indicates the information for proper installation and operation in this instruction.

- Indicates a procedural step or work to be done.

Parts List				
No.	Component Name	Part No.	Qty	Remark
1	Pad (Fuel Tank)	39156-2221	1	

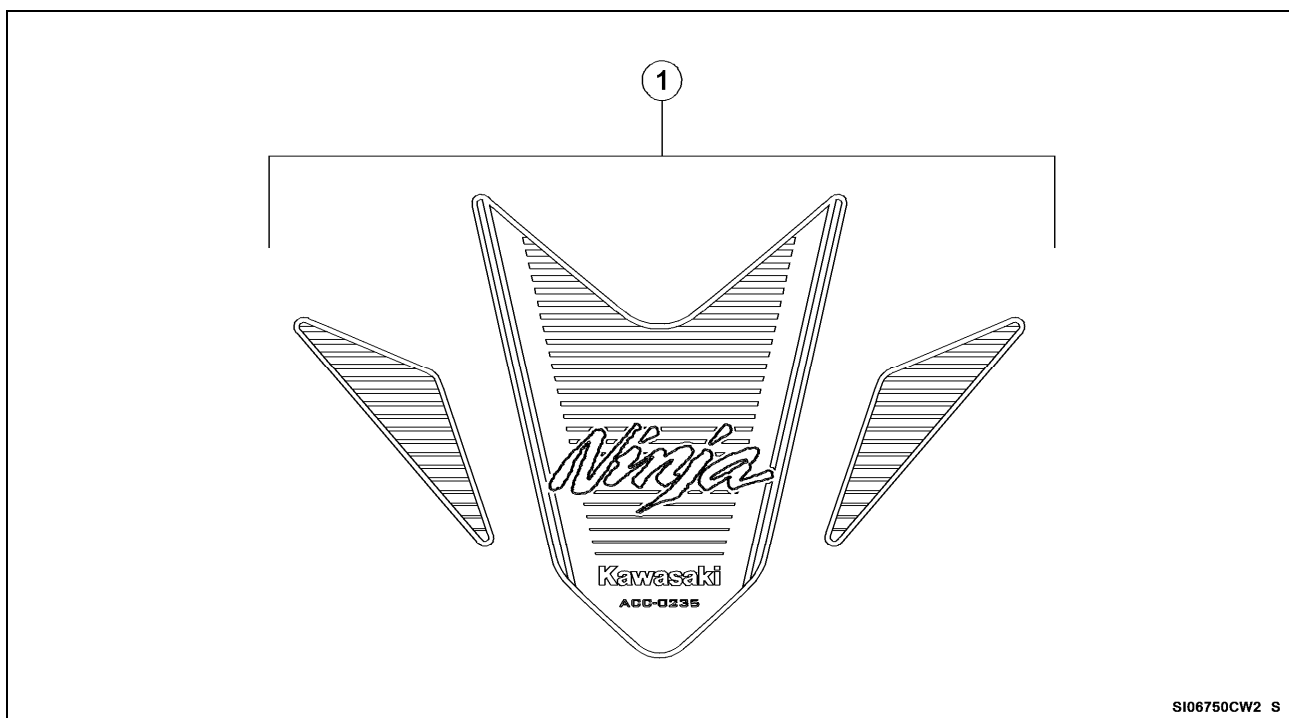

Installation Instructions

- Using a high flash-point solvent, clean off any oil or dirt that may be on the fuel tank. Dry them with a clean cloth.
- Remove each fuel tank pad [1] from the release paper.
- Put each fuel tank pad [1] on the fuel tank [A] as shown.
 - 113 ±0.5 mm (4.45 ±0.02 in.) [B]
 - 35 ±0.5 mm (1.4 ±0.02 in.) [C]
 - 10 ±0.5 mm (0.39 ±0.02 in.) [D]
 - 14 ±0.5 mm (0.55 ±0.02 in.) [E]

