

Assembly Instructions

Model:	KLE650E/F, KLZ1000B, ZX1000W, EX650J/K
Description:	DC Output Kit
Part Number:	99994-0485
Flat Rate Time(Hr):	KLE650E/F, KLZ1000B, ZX1000W: 0.3 EX650J/K: 0.7

Before you begin, read through these instructions and check that all parts are present. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.

Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.

The following symbol indicates the information for proper installation and operation in this instruction.

NOTE : NOTE indicates information that may help or guide you in the operation or service of the vehicle.

(KLE650E/F) Refer to the Service Manual (P/No.: 99924-1490-01) for detailed procedures.

(KLZ1000B) Refer to the Service Manual (P/No.: 99924-1478-01) for detailed procedures.

(ZX1000W) Refer to the Service Manual (P/No.: 99924-1519-01) for detailed procedures.


(EX650J/K) Refer to the Service Manual (P/No.: 99924-1517-01) for detailed procedures.

NOTE

○ This kit does not operate on KLE650E/F if the relay is not installed, therefore install the relay kit (see Relay Kit (P/No.:99994-0556) for Assembly Instructions Manual).

○ The relay kit is not necessary to operate this kit on KLZ1000B, ZX1000W and EX650J/K.

Parts List				
No.	Component Name	Part No.	Qty	Remark
1	Socket	13151-0566	1	

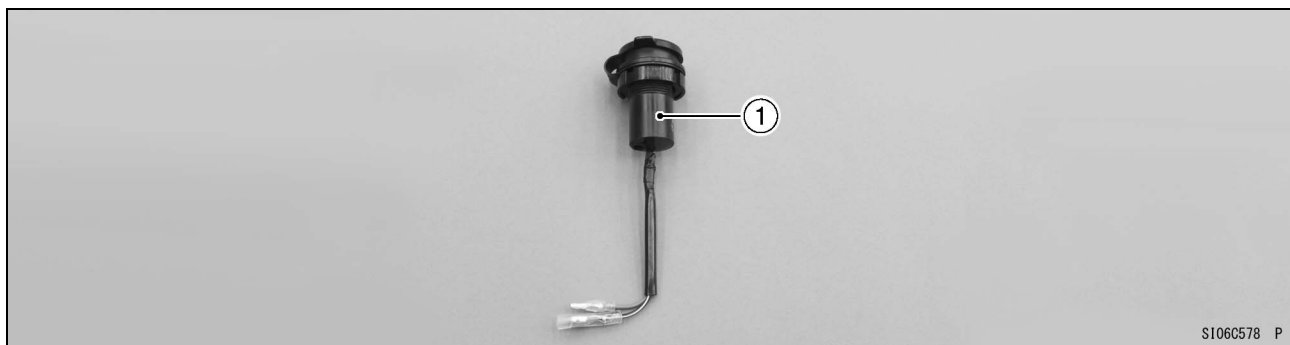

S1060578 P





Installation Instructions

Assembly Procedure (KLE650E/F)

- Remove:
 - Inner Cover (Refer to the Service Manual)
 - Socket Cover Screw [A]
 - Bracket [B]
 - Socket Cover [C]
- Install the socket [1] so that the projection [A] fits the groove [B] of the meter cover.
- Tighten the nut [A].
Torque – 12 V Socket Nut: 2.8 N·m (0.29 kgf·m, 25 in·lb)
- Remove the tape [A] to free the connectors [B].
- Free the accessory lead [C] from the clamp [D].
- Connect the connectors [A] to the main harness.
- Install:
 - Inner Cover (Refer to the Service Manual)

NOTE

- Do not pinch the socket leads with the inner cover.

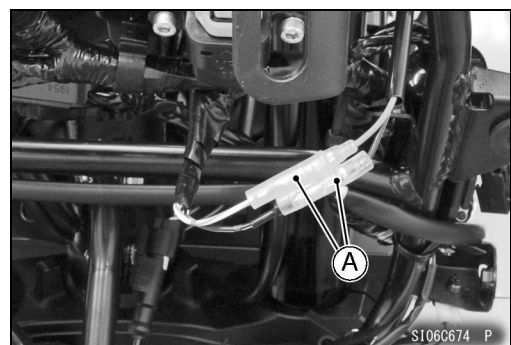
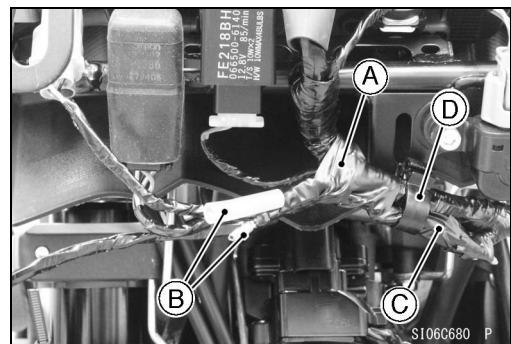
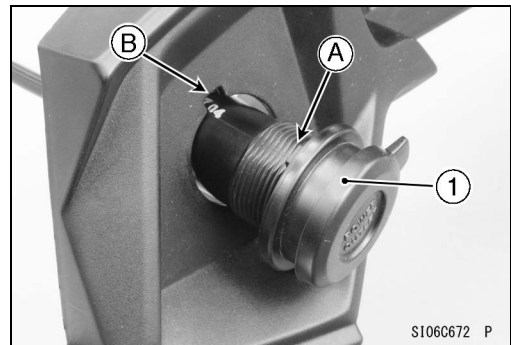
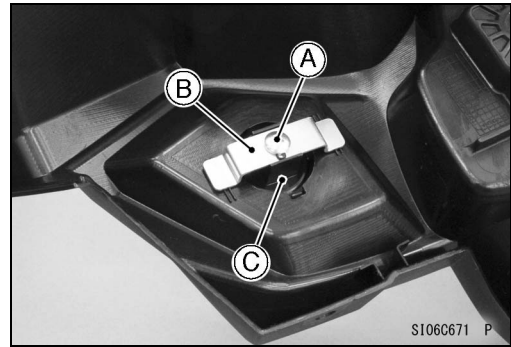


Assembly Procedure (KLZ1000B)

- Remove:
 - Meter Cover (Refer to the Service Manual)
 - Socket Cover Screw [A]
 - Bracket [B]
 - Socket Cover [C]
- Install the socket [1] so that the projection [A] fits the groove [B] of the meter cover.
- Tighten the nut [A].
Torque – 12 V Socket Nut: 2.8 N·m (0.29 kgf·m, 25 in·lb)
- Connect the connectors [A] to the main harness.
- Install:
 - Meter Cover (Refer to the Service Manual)

NOTE

○ Do not pinch the socket leads with the meter cover.

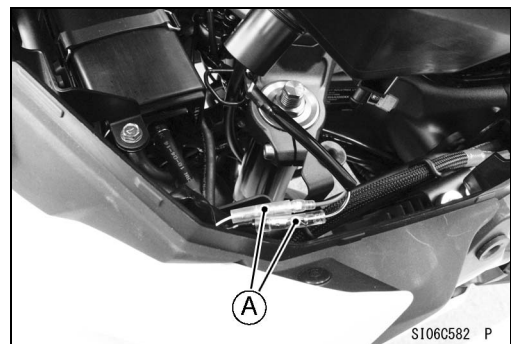
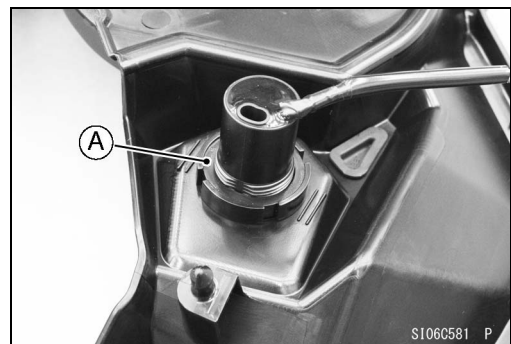
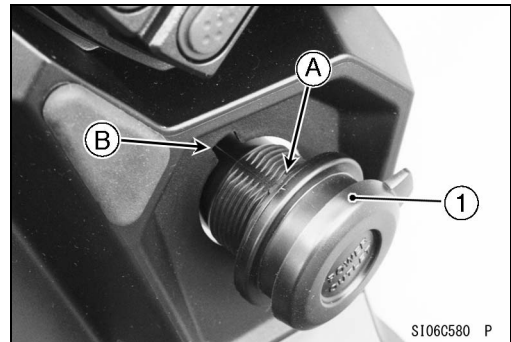
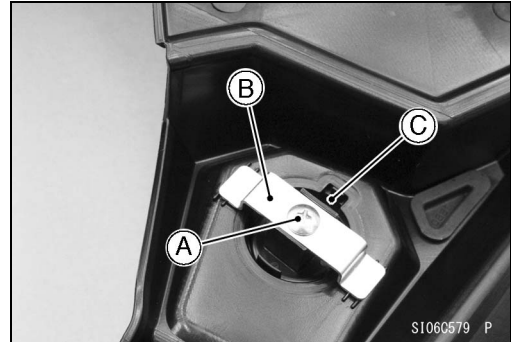


Assembly Procedure (ZX1000W)

- Remove:
 - Meter Cover (Refer to the Service Manual)
 - Socket Cover Screw [A]
 - Bracket [B]
 - Socket Cover [C]
- Install the socket [1] so that the projection [A] fits the groove [B] of the meter cover.
- Tighten the nut [A].
Torque – 12 V Socket Nut: 2.8 N·m (0.29 kgf·m, 25 in·lb)
- Connect the connectors [A] to the main harness.
- Install:
 - Meter Cover (Refer to the Service Manual)

NOTE

○ Do not pinch the socket leads with the meter cover.

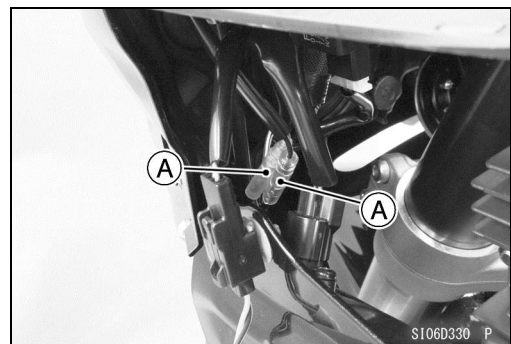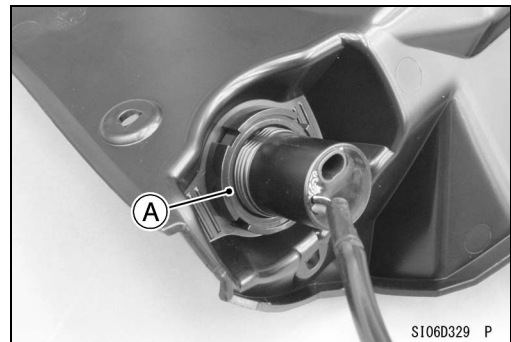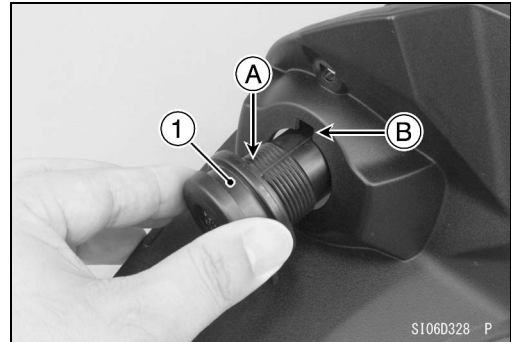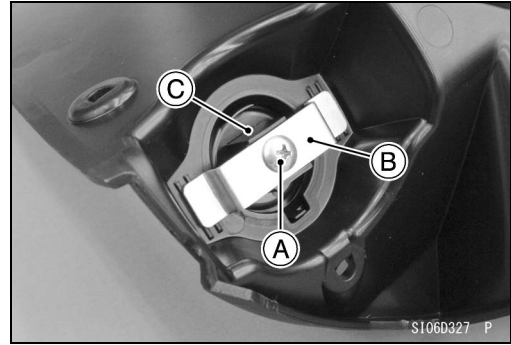

Assembly Procedure (EX650J/K)

- Remove:
 - Upper Inner Fairing (Refer to the Service Manual)
 - Socket Cover Screw [A]
 - Bracket [B]
 - Socket Cover [C]

- Install the socket [1] so that the projection [A] fits the groove [B] of the upper inner fairing.

- Tighten the nut [A].
Torque – 12 V Socket Nut: 2.8 N·m (0.29 kgf·m, 25 in·lb)

- Connect the connectors [A] to the main harness.
- Run the socket lead under the upper fairing bracket.
- Position the socket leads to the inside of the upper fairing.
- Install:
 - Upper Inner Fairing (Refer to the Service Manual)

NOTE

- Do not pinch the socket leads with the upper inner fairing.

