

Assembly Instructions

Model:	KLE250B/C, KLE300A/B/C
Description:	Pad (Fuel Tank)
Part Number:	99994-1000
Flat Rate Time(Hr):	0.1

Before you begin, read through these instructions and check that all parts are present. Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.


Kawasaki recommends that all genuine accessories should be fitted by an authorized Kawasaki dealer.

The following symbols indicate the information for proper installation and operation in this instruction.

NOTE : NOTE indicates information that may help or guide you in the operation or service of the vehicle.


- Indicates a procedural step or work to be done.

Parts List				
No.	Component Name	Part No.	Qty	Remark
1	Pad (Fuel Tank)	39085-0009	1	
2	Pad (Fuel Tank)	39085-0010	1	

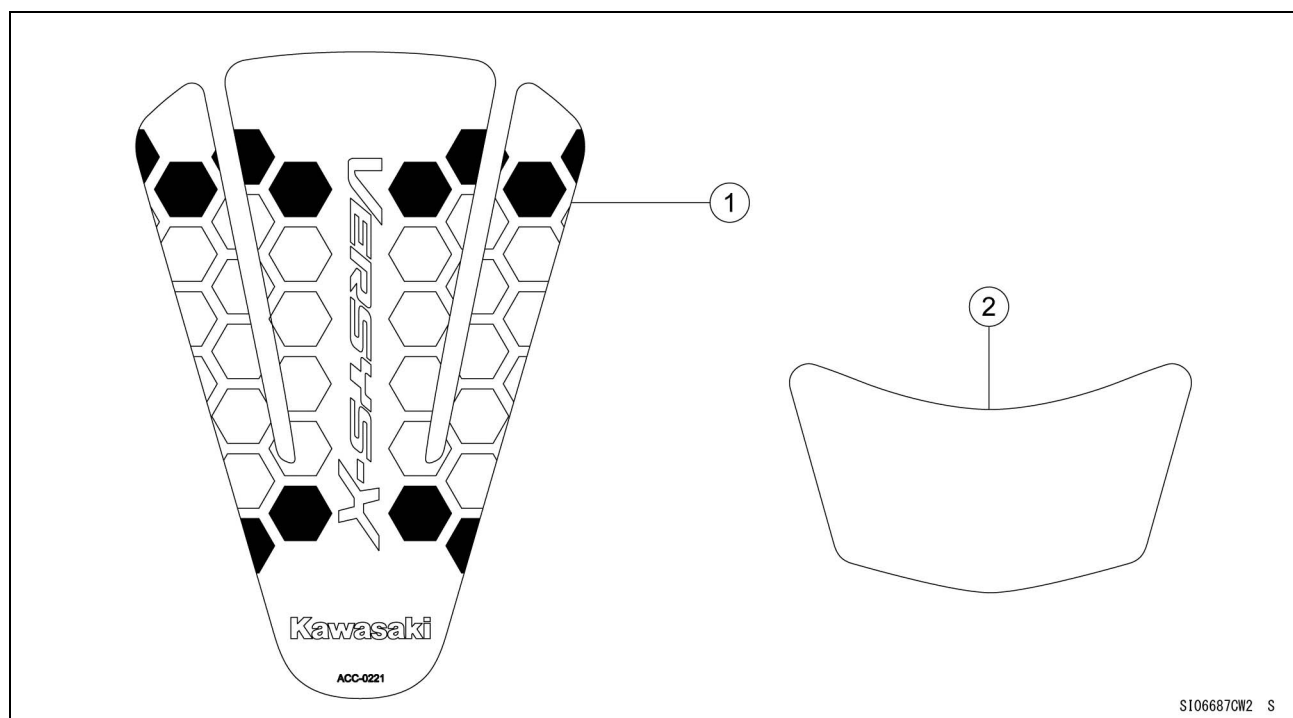

Installation Instructions

- Using a high flash-point solvent, clean off any oil or dirt that may be on the fuel tank. Dry them with a clean cloth.
- Remove the fuel tank pad [1] from the release paper.
- Put the fuel tank pad [1] to the center of the fuel tank [A], and on about 97 mm (3.8 in.) [B] from the corner end [C] in the figure.

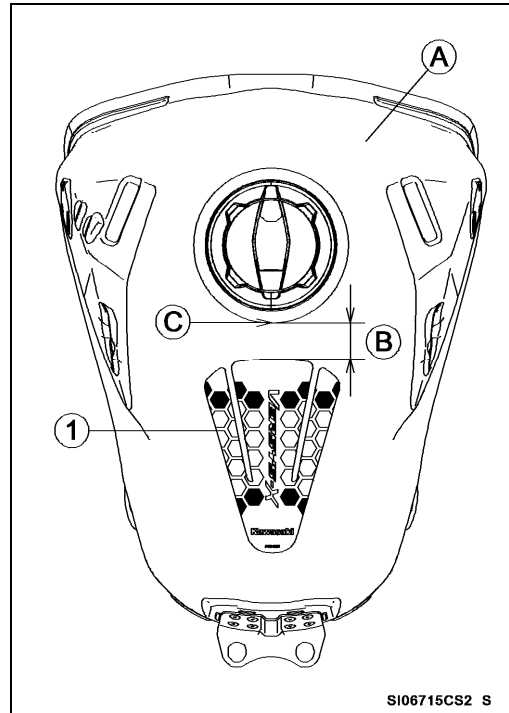

NOTE

○ *When the motorcycle is equipped with high seat, the fuel tank pad [2] does not need to use.*

- Remove the fuel tank pad [2] from the release paper.
- Put the fuel tank pad [2] to the center of the fuel tank, and on about 5 mm (0.2 in.) [A] from the lower end of the fuel tank pad [1].

