




## FANG SIGNAL LIGHT INSERTS

### Parts Included:

2 Fang Signal Light Inserts

### Installation Instructions:

1. Park on a level surface and shut off the motorcycle. Ensure that the engine has time to cool before installation.
2. Place screw driver in slot at bottom of stock signal light to remove lens.

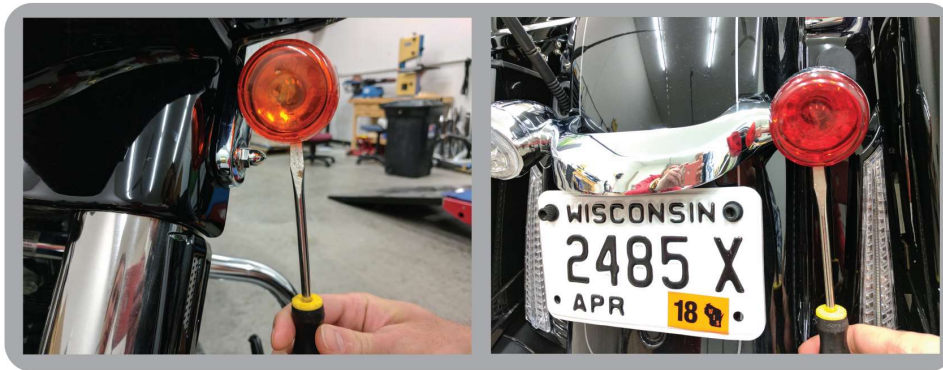

3. Push in and turn bulb counterclockwise to remove. Stock lens and bulb will not be reused.

4. Install **Ciro Fang Signal Light Insert** by pushing connector into socket and turning clockwise. You can use a screw driver to push the connector in and turn to lock it in place.



### WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

### CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

### ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All **Ciro** products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

### NOTE:

**Ciro** products are designed and manufactured under very strict quality control. **Ciro** products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer.

**Ciro** will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

**Ciro** will not be liable for any consequential and incidental damages, including labor, or non-**Ciro** products.

Please visit our website [Ciro3d.com](http://Ciro3d.com) for our complete warranty policy.

**CIRO3D.COM**