



INSTALLATION

RETRACTABLE PASSENGER PEGS

PART# 4352

NOTE: Can be used on any 93-up Touring Model for anyone wishing to convert from passenger boards to pegs. One pair of male mount pegs will need to be purchased separately.

PARTS INCLUDED

- 1 Right Side Adjustable Passenger Peg Assembly
- 1 Left Side Adjustable Passenger Peg Assembly
- 2 Spline Board Mounts
- 2 5/16-18 x 2" Socket Head Cap Screws
- 2 Trident Peg Assemblies
- 1 Installation Instructions

Please read and understand entire instructions before starting installation.

THANK YOU FOR CHOOSING KÜRYAKYN!

IN ORDER TO PROTECT YOU AND OTHERS FROM POSSIBLE INJURY AND/OR PROPERTY DAMAGE OR LOSS, PLEASE PAY CLOSE ATTENTION TO ALL INSTRUCTIONS, WARNINGS, CAUTIONS AND ATTENTION NOTES REGARDING THE USE AND CARE OF THIS PRODUCT.

WARNING! THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY

ATTENTION! This indication alerts you to the fact that ignoring the contents described herein may negatively affect product performance and functionality.

TOOLS SUGGESTED

Set of Hex Wrenches, Snap Ring Pliers

STRICTLY OBSERVE THE FOLLOWING GUIDELINES IN ORDER TO USE THE PRODUCT PROPERLY AND AVOID POTENTIALLY DANGEROUS ACCIDENTS.

- STEP 1** Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let cool.
- STEP 2** Remove the stock passenger peg from the stock peg mount.
- STEP 3** As shown in PIC 1, remove the fastener holding the stock passenger peg mount to the motorcycle frame. Save the fastener, it will be reused.

-cont.-

4352-22HD-1110

CUSTOMER SERVICE
877.370.3604 (toll free)

INSTALLATION QUESTIONS
techsupport@kuryakyn.com
or call 715.247.2983

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials and workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

- Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
 - The product must be properly installed, maintained and operated under normal conditions.
 - Kuryakyn makes no warranty, expressed or implied, with respect to any gold plated products.
 - Kuryakyn shall not be liable for any consequential and incidental damages, including labor and paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn and a customer.
- Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
- Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'S contained in components of Kuryakyn products will be warranted for defects in materials and workmanship for 3 years from the date of purchase where as all other components shall be warranted for one(1) year. This includes, but is not limited to; control modules, wiring, chrome & other components.

• Kuryakyn makes no warranty of any kind in regard to other manufacturer's products distributed by Kuryakyn. Kuryakyn will pass on all warranties made by the manufacturer and where possible, will expedite the claim on behalf of the customer, but ultimately, responsibility for disposition of the warranty claim lies with the manufacturer.

ABOUT OUR CATALOG

For purchasing Kuryakyn® products, you can receive a complete catalog free of charge. Send the Proof-of-Purchase below with your address to: Kuryakyn, P.O. Box 339, Somerset, WI 54025. Please indicate either Accessories Catalog for Harley-Davidson® or GL & Metric Cruisers.

Be sure to ask your local dealer about other Kuryakyn® products, the motorcycle parts and accessories designed for riders by riders.


©2005 Kuryakyn USA® All Rights reserved.



kuryakyn.com

STEP 4 Using the fastener from Step 3, attach the new adjustable passenger peg assembly to the motorcycle where the stock mount was located. Tighten the fastener.

NOTE: **The assembly can be mounted in any of the passenger mount holes on the frame. This allows you to customize the height of the peg assembly for your passenger.**

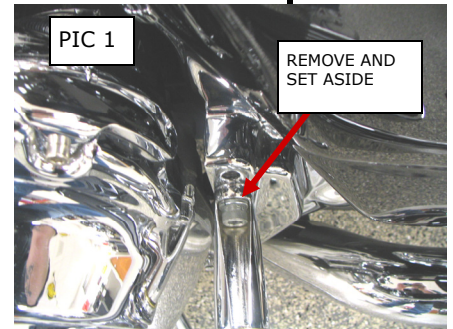


STEP 5 Mount the passenger peg in the clevis using the included wave-washers if necessary

STEP 6 Adjust the passenger foot peg angle by loosening the bolt (PIC 2) and adjusting the clevis as desired. Make sure the knurled nut is as close as it can be to the clevis before tightening clevis bolt. Tighten the bolt before securing the peg to the clevis.


STEP 7 Adjust the tension of the adjustable passenger peg arm by loosening the socket head bolt (PIC 2) and rotating the knurled nut. Rotating toward the arm will provide more friction. When adjusted as desired, tighten the socket head bolt and test the peg arm for desired tension again.

NOTE: **There are two holes in the knurled nut. If you can not get the knurled nut tight enough, insert a small screwdriver or hex wrench in to these holes and rotate to aid in tightening the knurled nut.**

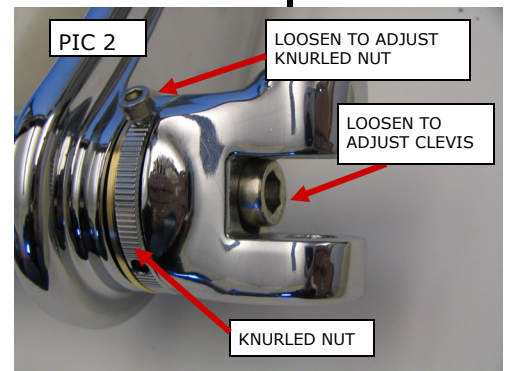

STEP 8 Mount the trident peg to the adjustable arm using the hardware included with the peg. Tighten the bolt securing the peg. PIC 3

STEP 9 Tighten all hardware and check for proper function. Test that no contact is made between the adjustable arms and components on the motorcycle.

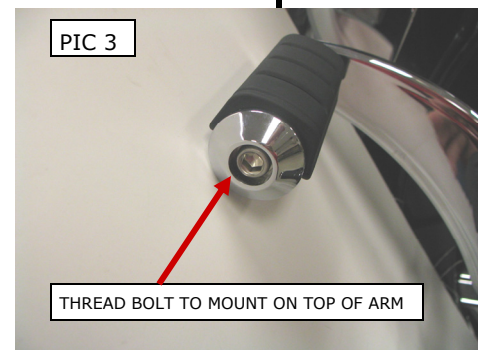

ATTENTION! **It is the installer's responsibility to ensure that all of the fasteners (including preassembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.**

To Mount Passenger Boards:

STEP 1 Remove the bolt shown in PIC 4. Remove the spline clevis from the mount assembly.

STEP 2 Find the included spline board mounts.

STEP 3 Remove the knurled nut and brass bushing from the clevis assembly removed in Step 1.

STEP 4 As shown in PIC 5, thread the knurled nut on to the new spline board mounts. Slide the brass bushing on to the spline board mount after the knurled washer.

STEP 5 Mate the spline mount of the floorboard with the new spline mount from Step 4. Insert the 5/16-18 x 2" Socket Head Cap Screw through the board and into the spline assembly to hold it in place. Loosely thread the footboard and spline mount assembly to the adjustable passenger peg mount. PIC 4


STEP 6 Adjust the floorboard to desired position and tighten the 5/16-18 x 2" Socket Head Bolt. Make sure the knurled nut is against the collar on the spline board mount before tightening.

STEP 7 Adjust the tension of the adjustable passenger peg arm by loosening the socket head bolt (PIC 3) and rotating the knurled nut. Rotating toward the arm will provide more friction. When adjusted as desired, tighten the socket head bolt and test the peg arm for desired tension again.

NOTE: There are two holes in the knurled nut. If you can not get the knurled nut tight enough, insert a small screwdriver or hex wrench in to these holes and rotate to aid in tightening the knurled nut.

STEP 8 Tighten all hardware and check for proper function. Test that no contact is made between the adjustable arms and components on the motorcycle.

ATTENTION! It is the installer's responsibility to ensure that all of the fasteners (including pre-assembled) are tightened before operation of the motorcycle. Küryakyn will not warranty components lost due to improper installation. Periodic maintenance may be required.

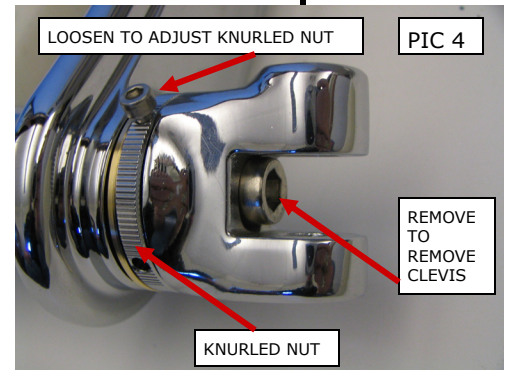

assembly

