


# MOUNTING INSTRUCTIONS

## X4 Mounting Straps



### OPTION 1 SIDE TO SIDE ORIENTATION

1

A) Wrap x2 straps around a non-moving, metal frame or sub-frame and pass end through loop

- B) 1. Couple x2 straps together as shown here.  
2. Open seat and evenly secure center of strap assembly under seat.  
3. Replace and secure seat over strap assembly



#### IMPORTANT


EVERY VEHICLE IS DIFFERENT. IT IS YOUR RESPONSIBILITY TO ENSURE THE PRODUCT IS PROPERLY AND SECURELY MOUNTED

Contact your vehicle manufacturer and read your owners manual for the correct mounting anchor points on your vehicle

2

A) Place duffel centered on rear seat

B) Pass ALL buckle ends of straps through lower D-Rings on both front /rear sides



C. Tighten down ALL webbing adjusters and move down ALL elastic webbing keepers

### OPTION 2 FRONT TO BACK ORIENTATION

1

A) Wrap x2 straps around a non-moving, metal frame or sub-frame and pass end through loop

- B) 1. Couple x2 straps together as shown here.  
2. Open seat and evenly secure center of strap assembly under seat.  
3. Replace and secure seat over strap assembly



#### IMPORTANT


EVERY VEHICLE IS DIFFERENT. IT IS YOUR RESPONSIBILITY TO ENSURE THE PRODUCT IS PROPERLY AND SECURELY MOUNTED

Contact your vehicle manufacturer and read your owners manual for the correct mounting anchor points on your vehicle

2


A) Place duffel centered on rear seat

B) Pass ALL buckle ends of straps through lower D-Rings on both front /rear sides



C. Tighten down ALL webbing adjusters and move down ALL elastic webbing keepers

### OPTION 3 LUGGAGE RACK SIDE TO SIDE ORIENTATION

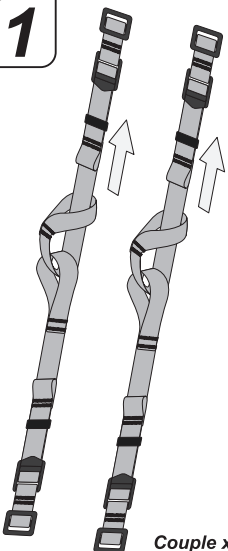

Couple x2 straps together as shown here


2

#### IMPORTANT

EVERY VEHICLE IS DIFFERENT. IT IS YOUR RESPONSIBILITY TO ENSURE THE PRODUCT IS PROPERLY AND SECURELY MOUNTED


Contact your vehicle manufacturer and read your owners manual for the correct mounting anchor points on your vehicle

A) Place duffel centered on rack

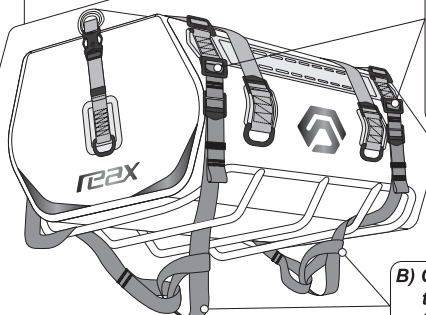


B) Coupled straps weave through luggage rack to hold duffel in place

C) Pass buckle ends of straps through lower D-Rings on both front /rear sides



3

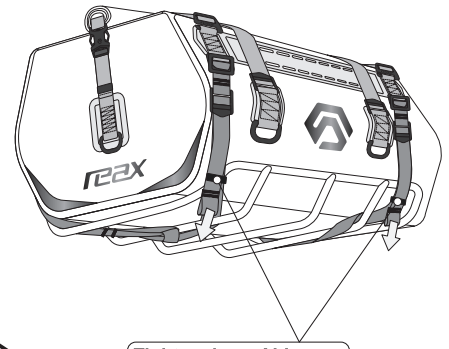

Tighten down ALL webbing adjusters and move down ALL elastic webbing keepers