

INSTALLATION INSTRUCTIONS

CUSTOM REAR TURN SIGNAL & LICENSE PLATE MOUNT FOR SCOUT

3140

THANK YOU FOR CHOOSING KURYAKYN!

Protect yourself and others from possible injury and property damage or loss. Pay close attention to all instructions, warnings, cautions, and notices regarding the installation, use, and care of this product.

⚠ WARNING

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN POTENTIAL DEATH OR SERIOUS INJURY.

⚠ CAUTION

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN CAN RESULT IN MINOR OR MODERATE POTENTIAL INJURY.

NOTICE

THIS INDICATION ALERTS YOU TO THE FACT THAT IGNORING THE CONTENTS DESCRIBED HEREIN MAY NEGATIVELY AFFECT PRODUCT PERFORMANCE AND FUNCTIONALITY OR DAMAGE THE PRODUCT ITSELF OR THE PRODUCT TO WHICH IT IS BEING ATTACHED.

ENSURE THAT THE FOLLOWING PARTS HAVE BEEN INCLUDED IN THE KIT:

- | | | | |
|---|----------------------------|---|--------------------------------------|
| 1 | Plate Mount Bracket | 3 | #8-32 Hex Nuts |
| 1 | Inner Fender Mount Bracket | 2 | 1/4-20 X 3/4" Socket Head Cap Screws |
| | | 2 | 1/4-20 Nylon Lock Nuts |

YOU WILL ALSO NEED:

Metric and standard socket set, metric and standard socket bit set, ratchet, blue Loctite

NOTICE

THESE INSTALLATION INSTRUCTIONS CONTAIN IMPORTANT INFORMATION. ENSURE THE END USER RECEIVES THIS COPY AND IS AWARE OF ITS IMPORTANCE FOR FUTURE USE.

- THIS REAR TURN SIGNAL AND LICENSE PLATE MOUNT ACCEPTS ANY KURYAKYN BY KELLERMANN L.E.D. TURN SIGNALS OR AFTERMARKET TURN SIGNALS THAT MOUNT VIA M8 STUDS.
- WHEN MOUNTING KURYAKYN BY KELLERMANN ATTO, MICRO S, OR RHOMBUS S TURN SIGNALS, SEPARATE PURCHASE OF KURYAKYN M8 X 20MM ADAPTERS (P/N 2568) OR M8 X 40MM ADAPTERS (P/N 2569) (QTY 2) IS REQUIRED.
- IF USING 3-WIRE RED-RED OR 4-WIRE RED-RED-AMBER L.E.D. TURN SIGNALS, SEPARATE PURCHASE OF KURYAKYN REAR SIGNAL SPLITTER MODULE (P/N 2587 OR 2588) IS REQUIRED.
- IF USING 2-WIRE AMBER OR RED L.E.D. TURN SIGNALS, SEPARATE PURCHASE OF KURYAKYN PIGTAILS FOR L.E.D. TURN SIGNALS (P/N 2586) IS REQUIRED.


⚠ WARNING

A FACTORY SERVICE MANUAL WILL BE HELPFUL IN PERFORMING THIS INSTALLATION. DO NOT ATTEMPT TO PERFORM THIS INSTALLATION IF YOU ARE NOT CONFIDENT IN YOUR ABILITY TO COMPLETE ALL OF THE STEPS IN THE PROCEDURE; CONSULT A TRAINED TECHNICIAN. IMPROPER INSTALLATION COULD RESULT IN SERIOUS INJURY OR DEATH.

STEP 1

Read and understand all steps in the instructions before starting the installation. Park the motorcycle on a hard, level surface and turn off the ignition. Let motorcycle cool.

Note: Lifting your motorcycle on a jack may help take some tension out of the rear suspension, providing you with more room under the rear fender to work on the removal of OEM parts and installation of the new parts.

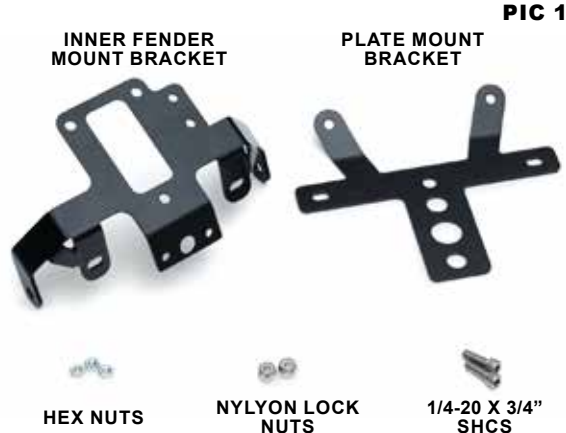

INSTALLATION INSTRUCTIONS

CUSTOM REAR TURN SIGNAL & LICENSE PLATE MOUNT FOR SCOUT

3140

-CONTINUED-

STEP 2 Refer to PIC 2 and 3. Under the rear fender unfasten existing turn signal and license plate assembly, disconnect lighting harnesses, and remove the entire turn signal and license plate assembly from the rear fender. Set mounting hardware aside, it will be reused.

STEP 3 Refer to PIC 4. Locate provided Inner Fender Mount Bracket and the OEM hardware that was removed in Step 2.

STEP 4 Refer to PIC 5. Align the mount bracket on the inside of the rear fender. Pass the light harnesses through the large rectangular opening in the bracket. Align the three (3) mounting holes around the rectangular opening with the mounting holes of the rear fender. Fasten it in place using the OEM hardware. Do not fully tighten hardware yet.

STEP 5 Locate provided Plate Mount Bracket, two (2) Socket Head Cap Screws, and two (2) 1/4-20 Nylon Lock Nuts. Apply a small amount of blue Loctite to the threads of the screws.

STEP 6 Refer to PIC 6 and 7. On the front side of the inner bracket align the mounting holes on the two arms of the plate mount bracket with the pill-shaped holes of the inner bracket. Insert provided screws through the front of the aligned holes and secure in place with the nylon nut on the back side. Do not fully tighten hardware yet.

STEP 7 **IF USING SOLD SEPARATELY NON-KELLERMANN TURN SIGNALS WITH M8 MOUNTS:**
Proceed to Step 8.


IF USING SOLD SEPARATELY KELLERMANN TURN SIGNALS AND M8 ADAPTER:

Locate the sold separately Kellermann light and M8 adapter. Apply a small amount of blue Loctite to the threads of the light and to the adapter. Feed the wire of the light through the adapter and secure it onto the light, if applicable.

STEP 8 Refer to PIC 8. Feed the wires of the turn signals through the side mounts located on the Plate Mount Bracket. Secure it to the plate mount bracket using the mounting hardware provided with the turn signal.

STEP 9 If using sold separately Kuryakyn Rear Signal Splitter Modules (PN 2587 or 2588), or 2-wire pigtails (PN 2586), install it now per the instructions provided with them.

Refer to FIG 1. Modules PN 2587 and 2588 can be secured to the top of the Inner Fender Mount by aligning the mounting holes of the modules with the three (3) threaded rods protruding from the bottom of the mount. Locate provided three (3) hex nuts and secure module to the inner fender mount's threaded rods.

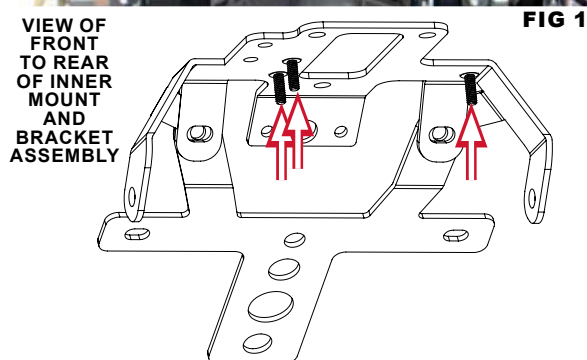

INSTALLATION INSTRUCTIONS

CUSTOM REAR TURN SIGNAL & LICENSE PLATE MOUNT FOR SCOUT

3140

-CONTINUED-

STEP 10 Refer to the installation instructions that were provided with the sold separate lights to complete the installation of the lights to the motorcycle. Test for proper functionality before moving forward.

STEP 11 Refer to PIC 9. Locate the license plate, license plate backer plate and mounting hardware from the license plate turn signal assembly that was removed in Step 2. Secure the license plate to the new license plate mount assembly using the OEM hardware.

STEP 12 Secure all wires in a safe place. Ensure that wires are secured away from any moving parts, excessive heat or pinch points.

NOTICE

SECURE ALL WIRING AWAY FROM ANY MOVING PARTS, PINCH POINTS OR EXTREME HEAT. KURYAKYN WILL NOT ISSUE A WARRANTY ON ANY ELECTRICAL COMPONENT THAT FAILS DUE TO PINCHED, CRIMPED, BROKEN, ABRADED, MELTED OR FRAYED WIRES.

STEP 13 Fully tighten all hardware:

- Inner fender mount to rear fender
- Plate mount bracket to inner fender mount
- Turn signals to plate mount bracket
- License plate to plate mount bracket
- Rear turn signal splitter modules to inner fender mount, if applicable

WARNING

ENSURE PROPER LIGHT OPERATION BEFORE RIDING THE MOTORCYCLE. VISIBILITY IS A MAJOR CONCERN FOR MOTORCYCLISTS. A LIGHT MALFUNCTION COULD RESULT IN DEATH OR SERIOUS INJURY.

NOTICE

IT IS THE INSTALLER'S RESPONSIBILITY TO ENSURE THAT ALL OF THE FASTENERS (INCLUDING PRE-ASSEMBLED) ARE TIGHTENED BEFORE OPERATION OF THE MOTORCYCLE. KURYAKYN WILL NOT PROVIDE WARRANTY COVERAGE ON PRODUCTS OR COMPONENTS LOST DUE TO IMPROPER INSTALLATION OR LACK OF MAINTENANCE. PERIODIC INSPECTION AND MAINTENANCE ARE REQUIRED ON ALL FASTENERS.





INSTALLATION INSTRUCTIONS

CUSTOM REAR TURN SIGNAL & LICENSE PLATE MOUNT FOR SCOUT

3140

-CONTINUED-

LIMITED WARRANTY

Kuryakyn warrants that any Kuryakyn products sold hereunder, shall be free of defects in materials & workmanship for a period of one (1) year from the date of purchase by the consumer excepting the following provisions:

1. Kuryakyn shall have no obligation in the event the customer is unable to provide a receipt showing the date the customer purchased the product(s).
2. The product must be properly installed, maintained & operated under normal conditions.
3. Kuryakyn shall not be liable for any consequential & incidental damages, including labor & paint, resulting from failure of a Kuryakyn product, failure to deliver, delay in delivery, delivery in nonconforming condition, or for any breach of contract or duty between Kuryakyn & a customer.
4. Kuryakyn products are often intended for use in specific applications. Kuryakyn makes no warranty if a Kuryakyn product is used in applications other than intended.
5. Kuryakyn electrical products are warranted for one (1) year from the date of purchase by the consumer. L.E.D.'s contained in components of Kuryakyn products will be warranted for defects in materials & workmanship for 3 years from the date of purchase whereas all other components shall be warranted for one (1) year.
6. All warranty claims must be directed to the place of purchase. Merchandise sold through internet auction sites or any other unauthorized reseller shall not carry a Kuryakyn warranty. If unsure, please contact the place of purchase to verify they are an authorized Kuryakyn reseller.

RETURN POLICY

Merchandise determined to be defective may be returned up to one year from the date of purchase. Returns must be processed through original seller. Returned merchandise for any other reason other than warranty claims must be in like new condition & subject to a 20% restocking fee. All returns are subject to inspection for determination of full or partial credit. Any returned part that shows evidence of being used or installed contrary to manufacturer's instructions, &/or subjected to improper handling, packaging or return shipping by the customer, will not be eligible for exchange, refund or warranty consideration. All returned electrical items will be inspected & tested. If electrical item is deemed functional, no credit will be issued & item will be returned. All sales are final on discontinued or closeout merchandise.

©2015 KURYAKYN HOLDINGS, LLC ALL RIGHTS RESERVED

KURYAKYN, KURYAKYN K logo and the marks appearing on this instruction sheet are registered and common law trademarks of Kuryakyn Holdings except noted third-party trademarks. A full listing of trademarks and trademark registrations owned by Kuryakyn Holdings can be found at www.kuryakyn.com/legal-notice.

Emissions Notice: The California Air Resources Board (CARB) does not permit the use of aftermarket emission-related parts(s) that alter the performance of OEM emission-related devices unless CARB has issued an Executive Order, other than on racing vehicles on closed courses. Check your local laws and manufacturer's information.

Listed Manufacturers and product model names are for reference only. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. All specifications are subject to change without notice.

For additional information on third-party product and company names, please consult our Web page at www.kuryakyn.com/legal-notice

