

### Victory Octane 2017 One-piece Seat

**Hardware:** 10mm x 16mm shoulder screws  
8mm x 15mm buttonhead Allen screw

**Tools needed:** 5mm Allen wrench  
6mm Allen wrench

#### Removal of stock seat:

1. Locate and remove the seat retaining bolt at the front of the seat using a 6mm Allen wrench.
2. Push the seat slightly forward, taking care not to hit the fuel tank, until the seat's rear bracket is clear of the fender mount.
3. Lift the back of the seat slightly and pull the seat back and up to remove.



## Installation of Mustang seat:

1. Install the supplied 10mm x16mm shoulder screw into the hole behind the tank. Tighten securely with a 6mm Allen wrench.



**Note: The rubber filler panel can be removed if desired. It is not required for mounting the Mustang seat.**

2. Remove the plug from the fender, revealing an 8mm threaded hole.



3. Engage the Mustang seat's front bracket with the shoulder screw and lower the seat to the fender




4. Secure seat to fender using supplied 8mm x 15mm buttonhead Allen screw. Tighten securely with a 5mm Allen wrench.

**Enjoy the comfort and custom look of your new Mustang seat!**

These steps are guidelines to help you install your new Mustang product. If you need further assistance, please call us at 800-243-1392 or 413-668-1100, Monday through Friday 8:30 - 5:00 Eastern or send an e-mail to [tech@mustangseats.com](mailto:tech@mustangseats.com) or visit our website at [www.mustangseats.com](http://www.mustangseats.com).

For care and maintenance of our seats, please go to our website under "Support".

Refers to part numbers: 75971, 79516

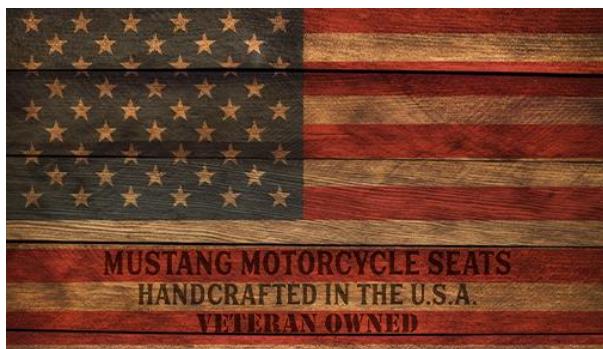

**Products made by Mustang Motorcycle Products, LLC are warranted for one year against defects in material and workmanship. Mustang must first be notified of any apparent defect. A return authorization will be issued. Carefully pack the product and return prepaid. Upon receipt, Mustang will make a fair, prompt decision regarding repair or replacement.**

**Incidental and consequential damages arising from or in connection with the installation or use of a Mustang product are not covered by this warranty. An original purchase receipt must be provided to obtain a warranty repair or replacement.**