



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198


www.yoshimura-rd.com

FENDER ELIMINATOR KIT

075BG125510

Honda

CBR 500R

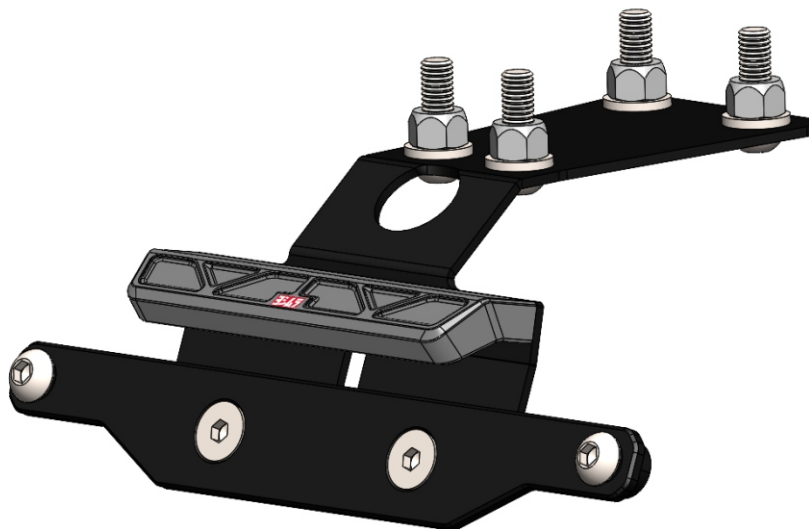


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



x1

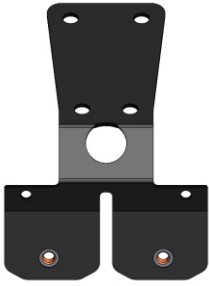


12551-FEBKT1
Fender Eliminator Bracket

x1



FE-LP-BKT
License Plate Bracket

x1

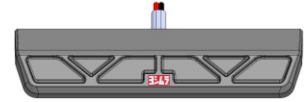

075BG-LH-H5
License Plate Light

x4



M6X20BHS-SS
6mm x 20mm
Button Head Screw

x2



M6X12FS-SS
6mm x 12mm
Flat Head Screw

x4




M6X10BHS
6mm x 10mm
Button Head Screw

x2




M4X6BHS
4mm x 6mm
Button Head Screw

x6



6MMWASHER-SS
6mm Stainless Washer

x6




6MMLN-SS
6mm Nylon Lock Nut

x3



ZT-400
Cable Tie

Assembly Diagram

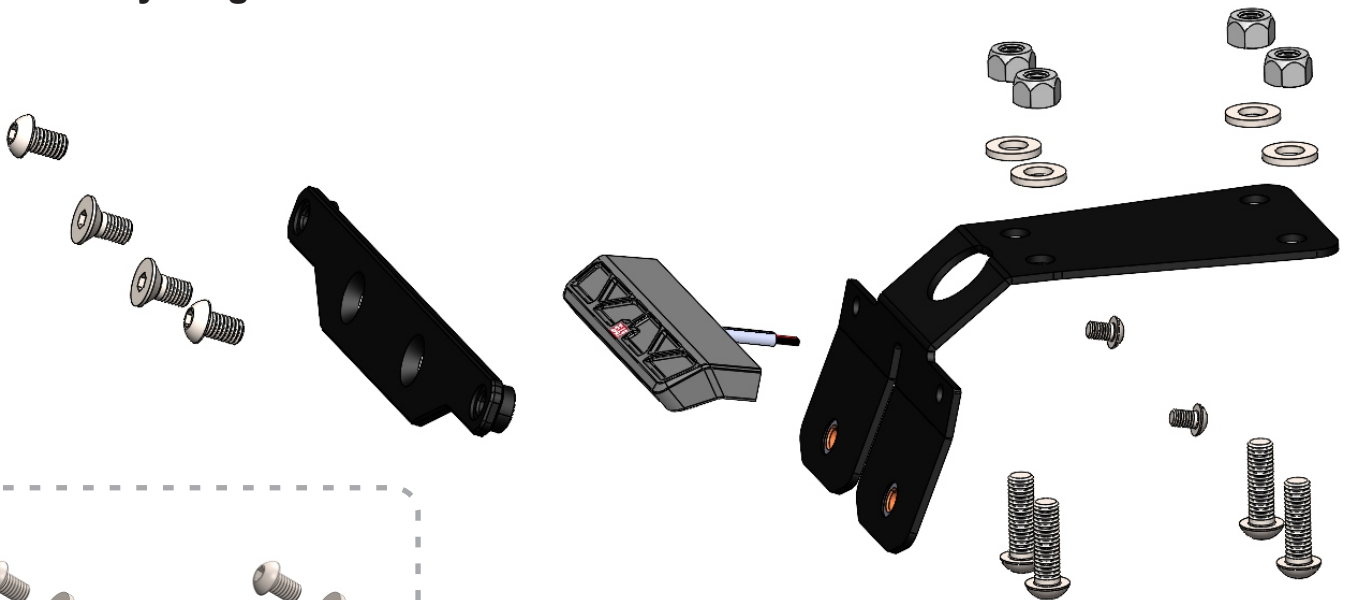

Button head screws, washers, and lock nuts are for the bottom two license plate holes.

IMPORTANT NOTE:

This kit does not include turn signal brackets to install OEM or aftermarket turn signals.


Ensure you have all necessary components prior to beginning installation.

Removal


1. Remove passenger seat.
2. Locate and disconnect license plate light and turn signal connectors.
3. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to the subframe. Carefully remove the stock fender assembly making sure not to damage connectors in the process.

Installation


1. Install *075BG-LH-H5*, license plate light onto *12551-FEBKT1*, fender eliminator bracket using *M4X6BHS*, 4mm screws.

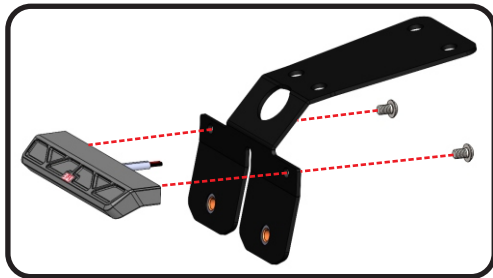

2. Secure and install *12551-FEBKT1*, fender eliminator bracket to subframe using *M6X20BHS*, 6mm button head screws from below and install *6MMWASHER* and *6MMLN*, 6mm washers and nuts from above as shown.

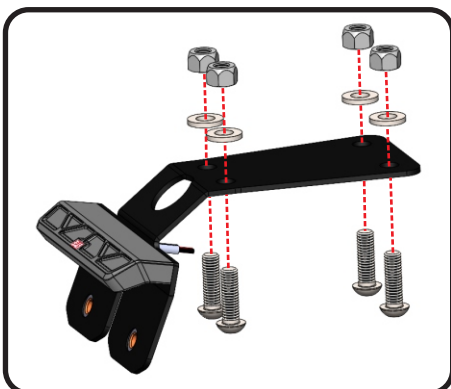

3. Install *FE-LP-BKT*, license plate bracket onto fender eliminator bracket using *M6X12FS-SS*, flat head screws.

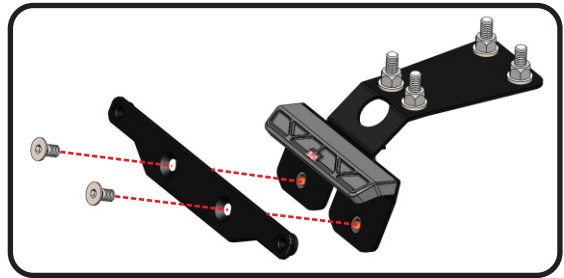

Note: *M6X10BHS*, button head screws will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, stainless washers are for the bottom license plate holes.

4. Route license plate light connector through the hole in *12551-FEBKT1*, fender eliminator bracket and through the lower rear cowl. Re-connect to the wiring harness.
5. Use the cable ties supplied in the kit to secure license plate light wires.
6. Re-install passenger seat.
7. Check for proper function of license plate light and that all brackets and components are secure prior to riding.