



YOSHIMURA

RESEARCH&DEVELOPMENT OF AMERICA, INC.


5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT

075BG194500

CFMOTO 450SS / 450NK

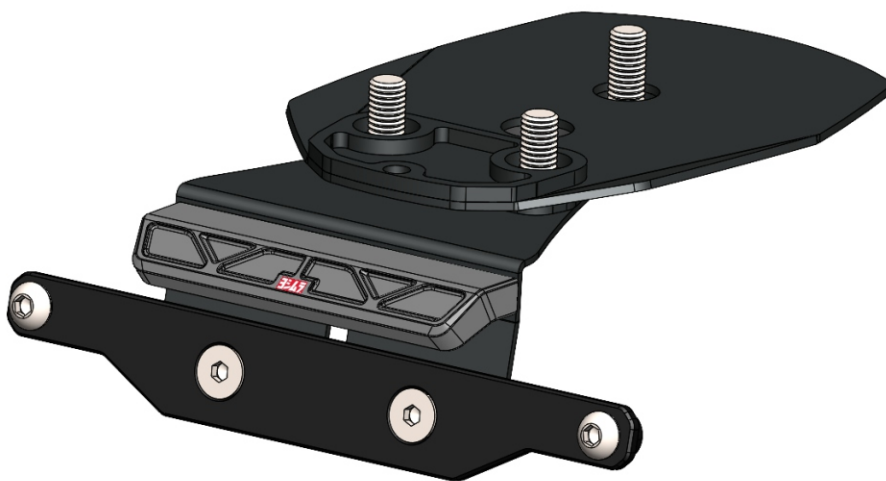


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.




x1



19450-FEBKT1
Fender Eliminator Bracket

x1



075BG-LH-C1
License Plate Light

x1



FE-LP-BKT
License Plate Frame

x3



M8X20BHS
8mm x 20mm
Button Head Screw

x2



M6X12FS-SS
6mm x 12mm
Flat Head Screw

x4



M6X10BHS
6mm x 10mm
Button Head Screw

x1




H-2158T
Wire Grommet

x2



6MMWASHER-SS
6mm Washer

x2




6MMLN-SS
6mm Lock Nut

x1



M4X6BHS
4mm x 6mm
Button Head Screw

Assembly Diagram

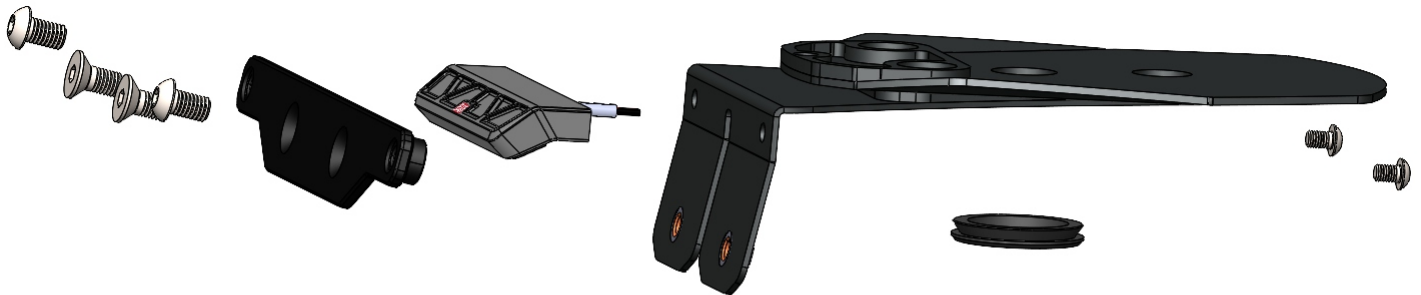

Button head screws, washers, and lock nuts are for the bottom two license plate holes.

IMPORTANT NOTE:

This kit does not include turn signal brackets to install OEM or aftermarket turn signals.


Ensure you have all necessary components prior to beginning installation.

Removal


1. Remove the passenger seat.
2. Locate and disconnect the license plate light and turn signal connectors.
3. While securely supporting the stock fender assembly, remove the three bolts securing the stock fender and carefully remove the stock fender assembly.

Installation

1. Install *075BG-LH-C1*, Yoshimura license plate light onto *19450-FEBKT*, Yoshimura fender eliminator bracket using *M4X6BHS*, 4mm button head screws provided in the kit.

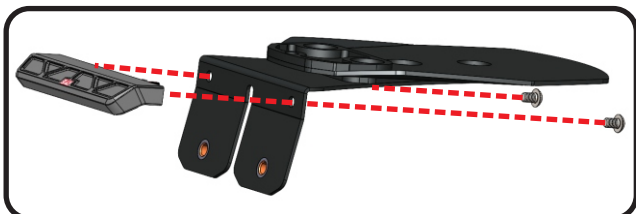


2. Install *FE-LP-BKT*, license plate bracket onto the fender eliminator bracket using *M6X12FS-SS*, flat head screws.

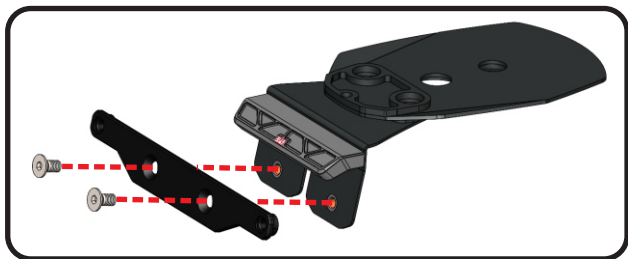


Note: *M6X10BHS*, button head screws will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, washers are for the bottom license plate holes.

3. Install *H-2158T*, wire grommet into bottom of *19450-FEBKT1*, fender eliminator bracket.

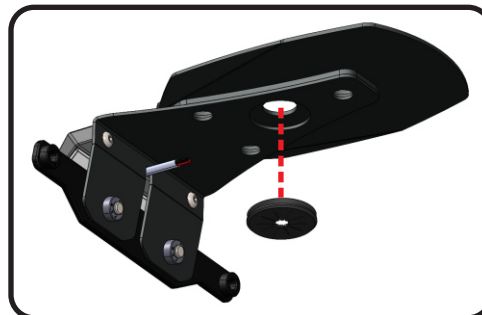

4. Route license plate light wire through hole in fender bracket, through hole in under-tail, and re-connect to the wiring harness.
5. Secure fender eliminator bracket assembly to frame using *M8X20BHS*, 8mm bolts included in the kit. Torque bolts to factory specifications.

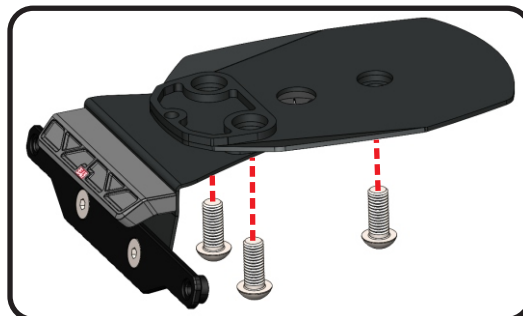

6. Re-install passenger seat.
7. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.