



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800) 634-9166 · (909) 628-4722 · FAX (909) 591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT




075BG133300
Yamaha MT-03

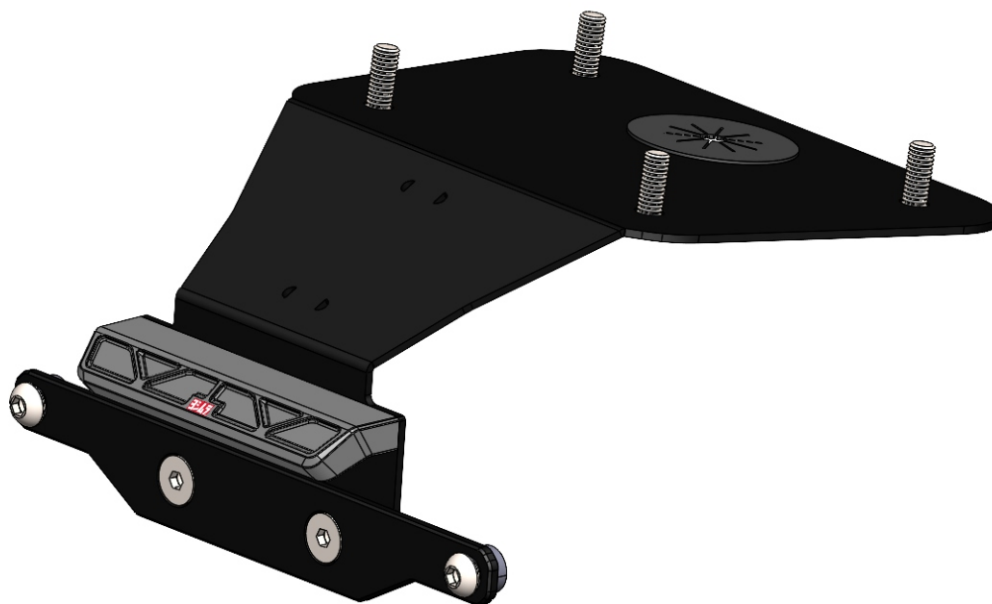


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



x1  13330-FEBKT-1 Fender Eliminator Bracket	x1  FE-LP-BKT License Plate Bracket	x1  075BG-LH-Y1 License Plate Light	
x1  H-2158T-1 Wire Debris Cover	x4  M6X16BHS 6mm x 16mm Button Head Screw	x4  M6X10BHS 6mm x 10mm Button Head Screw	x2  M4X6BHS 4mm x 16mm Button Head Screw
x2  6MMWASHER-SS 6mm Stainless Washer	x2  6MMLN-SS 6mm Nylon Lock Nut	x2  M6X12FS 6mm x 12mm Flat Head Screw	x2  ZT-400 Cable Tie

Assembly Diagram

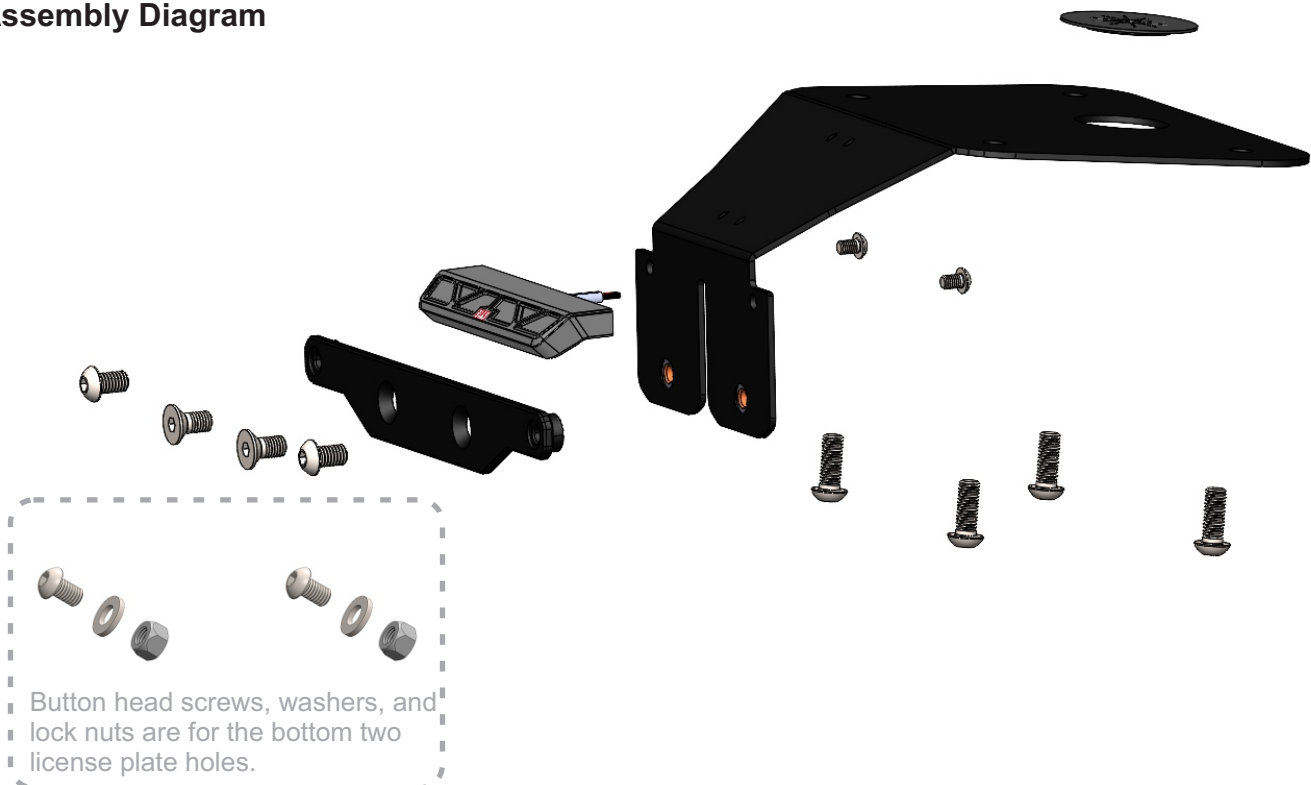


IMPORTANT NOTE:

This kit does not include turn signal brackets to install OEM or aftermarket turn signals. Ensure you have all necessary components prior to beginning installation.

Removal


1. Remove passenger and rider seat.
2. Remove the plastic tray. (2 push pins)
3. Locate and disconnect the license plate light and turn signal wires.
4. Remove the rubber seal covering two of the four nuts securing the rear fender assembly.

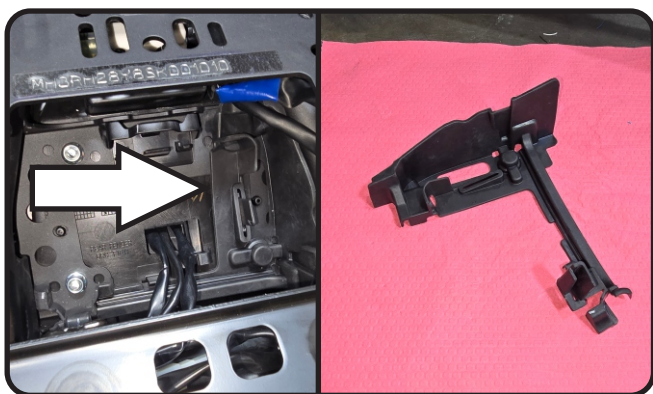


5. While supporting the stock fender assembly, remove the four nuts and carefully detach the stock fender assembly, making sure not damage the license plate light and turn signal connectors.

Installation


1. Install 075BG-LH-Y1, Yoshimura license plate light onto 13330-FEBKT-1, Yoshimura fender bracket using M4X6BHS, 4mm button head screws provided in the kit.

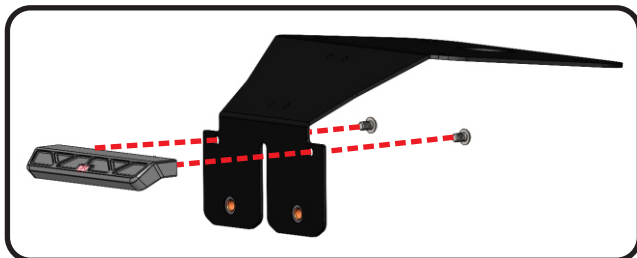


2. Route ZT-400, cable ties through 13330-FEBKT-1, fender eliminator bracket's crescent holes from underneath to secure the license plate light wires in a later step. Do not tighten at this time.

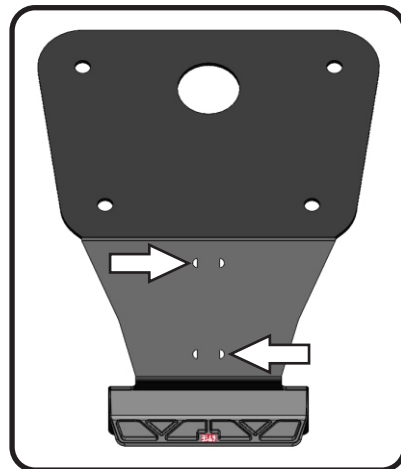


3. Install H-2158T-1, wire grommet into 13330-FEBKT-1, fender bracket from above.

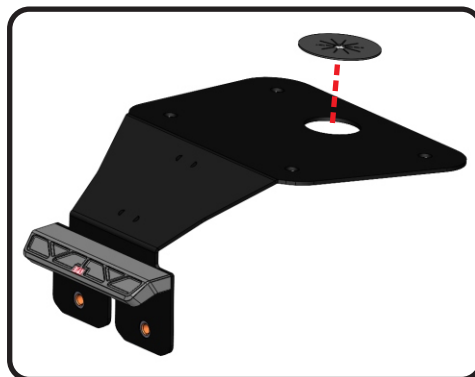

4. Secure 13330-FEBKT-1, fender eliminator bracket to frame using M6X16BHS, button head cap screws and the stock nuts.

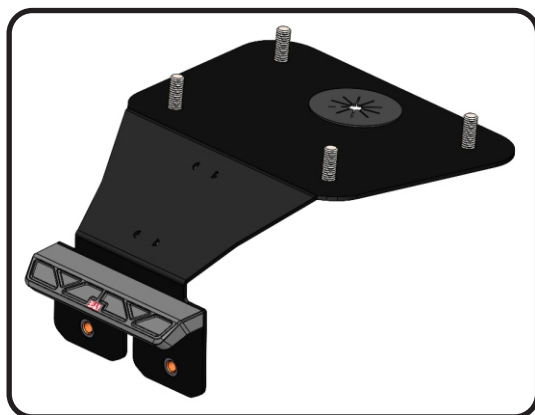

5. Install *FE-LP-BKT*, license plate bracket onto *13330-FEBKT-1*, fender eliminator bracket using *M6X12FS*, flat head screws.

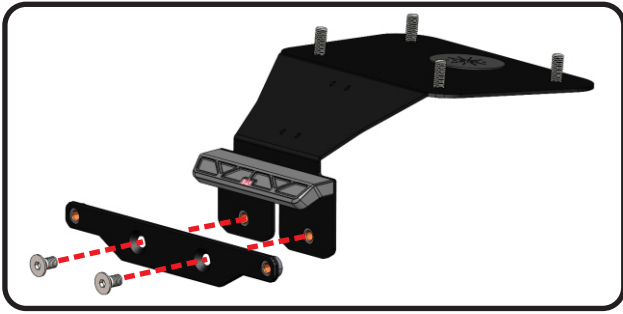

Note: *M6X10BHS*, button head screws, will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMLN-SS*, nylon lock nuts and *6MMWASHER-SS*, washers are for the bottom license plate holes.

6. Route license plate light through *H-2158T-1*, wire debris cover and under passenger seat and reconnect.
7. Tighten *ZT-400*, cable ties to secure the license plate wires to the fender eliminator bracket.
8. Re-install the rubber seal and plastic tray.
9. Re-install rider and passenger seat.
10. Check for proper function of license plate light, turn signals, brake light, and that all brackets and components are secure prior to riding.