



YOSHIMURA


RESEARCH&DEVELOPMENT OF AMERICA, INC.

5420 DANIELS STREET STE A, CHINO CA., 91710 · (800)634-9166 · (909)628-4722 · FACSIMILE (909)591-2198

www.yoshimura-rd.com

FENDER ELIMINATOR KIT

075BG141820
Kawasaki ZX10R

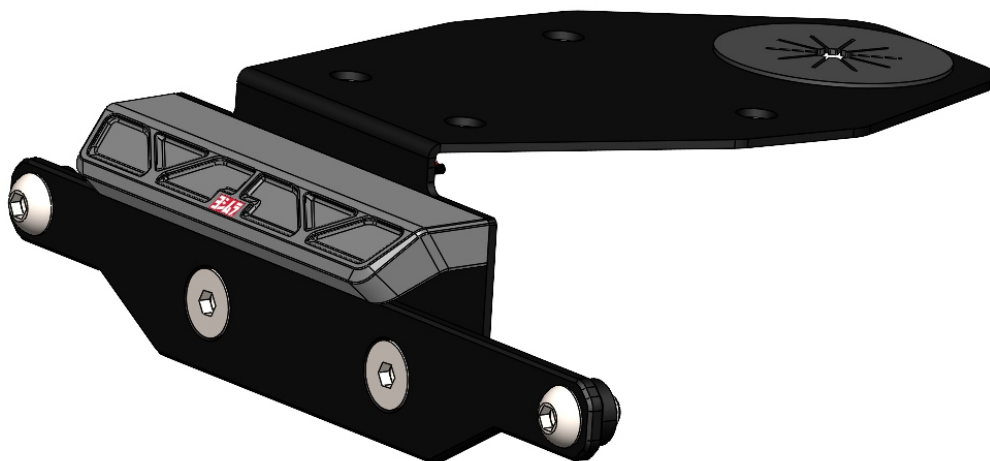


THIS PRODUCT IS NOT DOT APPROVED.

Yoshimura R&D of America, Inc. is not liable or responsible for any resulting event caused by the installation of this product. Check with local laws and regulations for compliance prior to installation and use. This product is not intended for use on public highways.



x1

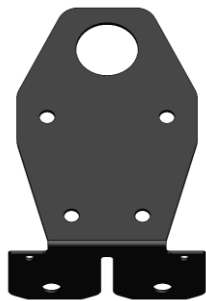

14182-FEBKT-3
Fender Eliminator Bracket

x1




FE-LP-BKT
License Plate Bracket

x1



075BG-LH-K2
License Plate Light

x1



H-2158T-1
Wire Debris Cover

x4



M6X10BHS
6mm x 10mm
Button Head Screw

x2



M6X12FS
6mm x 12mm
Flat Head Screw

x2




M4X6BHS
4mm x 6mm
Button Head Screw

x2




6MMWASHER-SS
6mm Stainless Washer

x2



6MMLN-SS
6mm Stainless
Nylon Lock Nut

Assembly Diagram

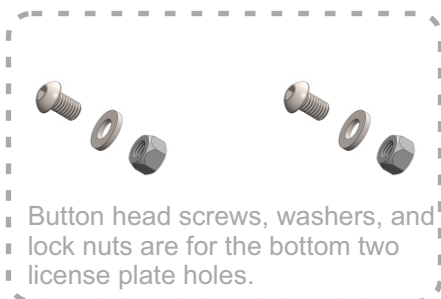

IMPORTANT NOTE:

This kit does not include turn signal brackets to install OEM or aftermarket turn signals.


Ensure you have all necessary components prior to beginning installation.

Removal


1. Remove passenger seat.
2. Remove upper passenger seat cowl.
3. Locate and disconnect license plate light and turn signal connectors and carefully remove the stock fender assembly making sure not to damage connectors in the process.
4. While securely supporting the stock fender assembly, remove the four bolts securing the fender assembly to the subframe. Carefully lower tail section to access license plate light and turn signal connectors.

Installation

1. Install *075BG-LH-K2*, license plate light onto *14182-FEBKT-3*, fender eliminator bracket using *M4X6BHS*, 4mm screws.

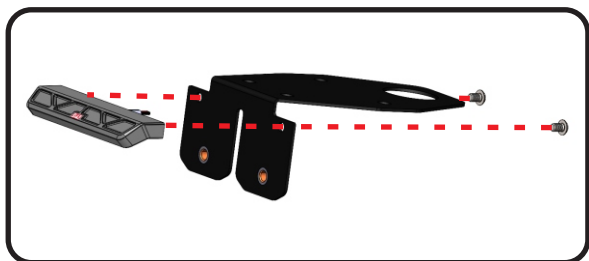


2. Install *FE-LP-BKT*, license plate bracket to *14182-FEBKT-3*, fender eliminator bracket using the *M6X12FS*, flat head screws.

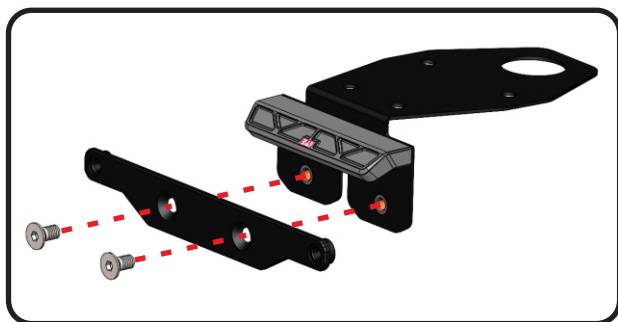

Note: *M6X10BHS*, button head screws, will be used to secure the license plate to *FE-LP-BKT*, license plate bracket. *6MMNLN-SS*, nylon lock nut and *6MMWASHER-SS*, washer are for the bottom license plate holes.

3. Insert *H-2158T-1*, wire debris cover into *14182-FEBKT-3*, fender eliminator bracket from above.

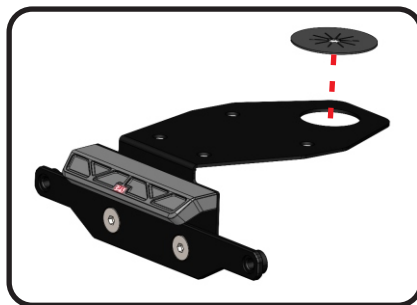

4. Route license plate light and turn signal wires through *14182-FEBKT-3*, fender eliminator bracket, *H-2158T-1*, wire debris cover, and through the lower rear cowl. Reconnect license plate light and turn signal connectors.
5. Using the four stock fender bolts, secure *14182-FEBKT-3*, fender eliminator to subframe. Torque to factory specification.

Note: Make sure license plate light and turn signal wires are not pinched between the lower tail and fender eliminator bracket. Wires should fit inside the channel of the fender eliminator bracket.

6. Re-install the rear upper passenger seat cowl and re-install passenger seat.
7. Check for proper function of license plate light and turn signals and that all brackets and components are secure prior to riding.