

MudSling™ R1300 GS

Installation Guide

+1 908. 652. 6779

sales@machineartmoto.com

PARTS:

MudSling GS1300
4-Plastic Rivet Screws

Tools Required:

- Medium length T20 Torx & Phillips screwdrivers.
- T40 Torx Socket Head wrench


- * BEFORE INSTALLATION, READ THESE INSTRUCTIONS FROM START TO FINISH.
- * PLACE BIKE ON CENTER STAND ON LEVEL GROUND.
- * MUDSLING CAN BE INSTALLED WITHOUT REMOVING THE REAR WHEEL.
- * MUDSLING R1300 GS CANNOT BE INSTALLED ON THE GSA.



CARE INSTRUCTIONS:

Clean with soap and water.
Use Armor-All to restore appearance.


COPYRIGHT 2025 MACHINEART INC.

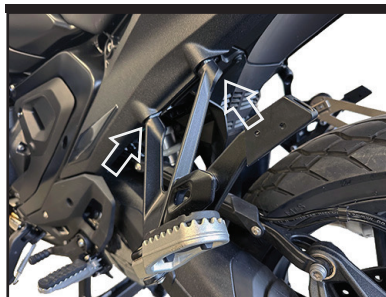

- 1** **OPTIONAL:** To provide sufficient working room, temporarily remove the **Left** side passenger footpeg using a T40 Torx socket wrench.



- 2** Remove the 2 plastic Rivet Screws holding the rubber mudflap using a T20 Torx screwdriver, and a flat head screwdriver. Remove the mudflap.

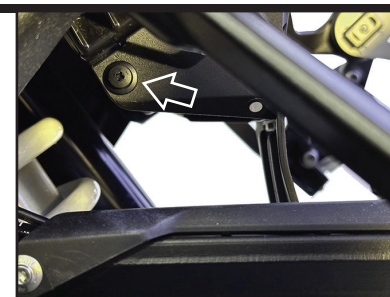

- 3** Remove the plastic Rivet Screws holding both **Left** and **Right** sides of the Center Cover.
Do Not remove the cover.



- 4** Position the MudSling over the BMW cover to align with the 2 central holes. Push-in 2 New Rivet Screws and screw in until firmly seated.



- 5** INSERT a New plastic Rivet Screw in the upper **LEFT** side hole of the **MudSling**. Push and Screw it in until firmly seated.



- 6** INSERT a New plastic Rivet Screw in the upper **RIGHT** side hole of the **MudSling**. Push and Screw it in until firmly seated.

- 7** **Double check each Rivet Screw.**
Re-install the Left side passenger peg, if previously removed.
You're Ready to Ride!

Rev: 2025 6-30

DISCLAIMER: All parts manufactured, designed or sold by Machineart Moto ("MaMo") should be installed by a qualified technician. The risk of injury is increased by improper installation or misuse of products. MaMo's customers must exercise good judgment in the use, alteration, part selection and installation on their motorcycles. In the event of a possible defect in material or design, the responsibility of MaMo is limited to a refund of the purchase price or the replacement of the part, if MaMo determines the part to be defective, and is subject to MaMo's inspection of the part within thirty (30) days from the date of purchase. (Note: any attempted repairs or modifications made to MaMo products will void this limited warranty). MaMo, under no circumstances will be responsible for incidental damages, or personal injury damage, except as provided by law.