

Fitting Instructions

Description:	FRONT AXLE GUARD KIT ACCESSORY (ACC-0009)
Part Number:	99994-0224
Model:	Z1000SX/NINJA1000 2011- (ZX1000G., ZX1000H..)
Assembly time:	Approx. ⌚ 10 mins.



Before you begin, read through these instructions and check that all parts are present.
Please note that Kawasaki cannot assume any responsibility for damage resulting from incorrect installation.
Kawasaki recommends that all genuine accessories should be fitted by an authorised Kawasaki dealer.



Apply a non-permanent locking agent for nuts and screw.
The parts help to protect technical parts, but may not avoid damages to body parts.

Parts List

No.	Component Name	Part No.	Qty	Remark
	GUARD ASSY			Full assembly (± gr)
1	DISC	(FAS0001.1)	2	With Kawasaki logo
2	NUT	92210-0733	1	
3	GUARD_LH	55020-0769	1	Left slider
4	RING-O (SEAL)	92055-0715	2	Rubber O-ring
5	COLLAR_LH (SPACER_LH)	92152-0994	1	Left spacer (11.5mm hole)
6	AXLE	213CCS0011A	1	
7	COLLAR_RH (SPACER_RH)	92152-0995	1	Right spacer (14mm hole)
8	GUARD_RH	55020-0770	1	Right slider
9	WASHER	92200-0733	2	Washer D20mm, d10.5mm, Th 2mm

Tools needed

Socket 13mm (x2), torque wrench, Loctite or similar locking agent

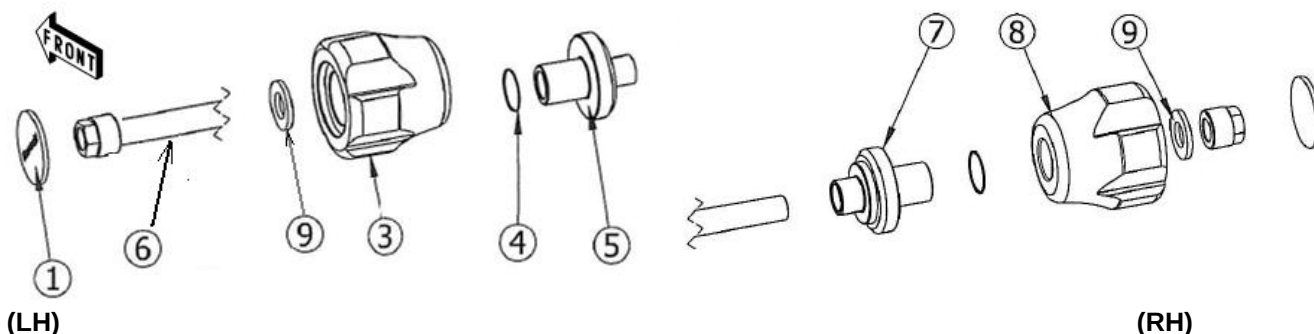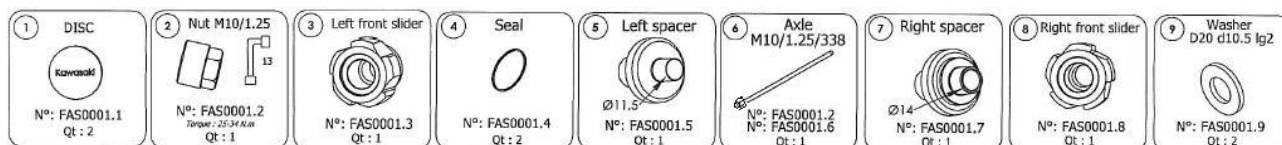

- (1.) Remove slider, spacer and right nut from package (left side is fixed to axle).
- (2.) Install left shaft assembly (2,6,9,3,4,5) to the bike.
- (3.) Assemble right spacer (7+4), slider (8), washer (9) and nut (2) and tighten.
Torque – [NUT no. 6 and 4] = 30 N•m (3.0 kgf•m, 21.3 ft•lb)
- (4.) Fit disc (1) left and right

After assembly and at regular intervals afterwards check that all screws and bolts are tight and retighten if necessary.