




YAMAHA XT 1200z Super Tenere SKID PLATE

INSTALLATION INSTRUCTIONS

Dear Rider,
Thank you for choosing Altrider! Whether a seasoned world adventurer or a first time ADV-Newbie, we welcome you to the Altrider experience. You can install your new product with the utmost confidence. Altrider designs, tests, and manufactures all of its products here in the United States. We are proud to do what we do, and honored to present to you the product of our labors.

Enjoy it, show it off, and most of all, RIDE IT!

Venture On,
Jeremy LeBreton

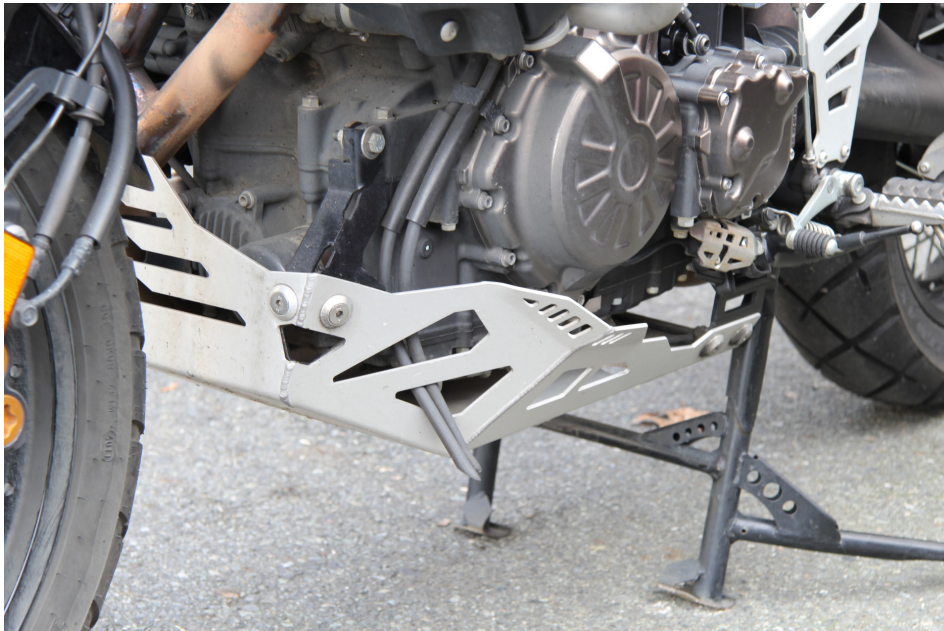

Altrider Skid Plate for Yamaha Super Tenere XT1200Z

Package Contents:

- skid plate
- mounting brackets
- hardware
- instructions

Altrider LLC

Global

mailing: 4000 Aurora Ave N Ste 100
Seattle, WA 98103 USA
phone: 206-922-3618
email: info@altrider.com
web: www.altrider.com


Europe

mailing: Oude Middenweg 231-M
2491 AG DEN HAAG
Netherlands
email: info@altrider.eu
web: www.altrider.eu



Rev 3



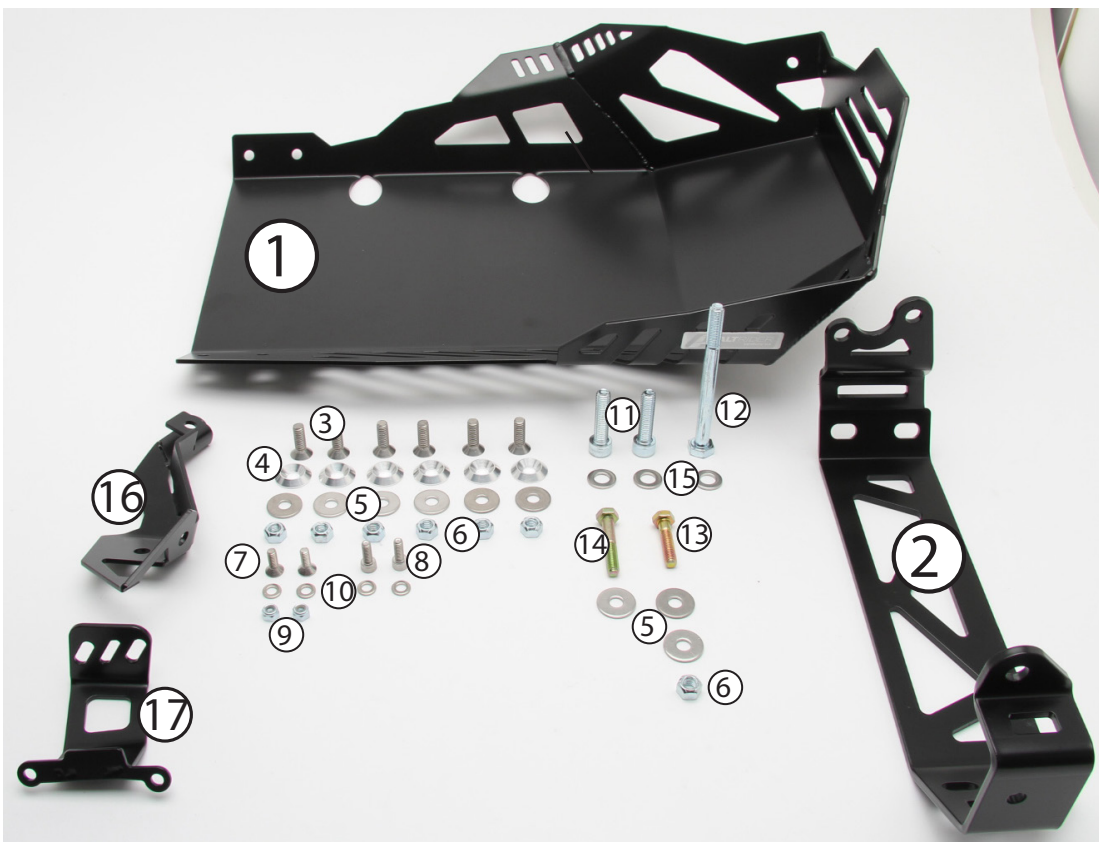

Kit:


- ① Skid Plate
- ② rear mount bracket
- ③ (6) M8 x 25 flat head fasteners
- ④ (6) M8 countersunk finishing washer
- ⑤ (9) M8 washers
- ⑥ (7) M8 locking nut
- ⑦ (2) M6 x 18 flat head fasteners
- ⑧ (2) M6 x 16 socket head fasteners
- ⑨ (2) M6 nylock nuts
- ⑩ (4) M6 washers
- ⑪ (2) M10 X 40 socket head screws
- ⑫ (1) M10 x 105 hex cap fastener
- ⑬ (1) M8 x 35 hex cap fastener
- ⑭ (1) M8 x 45 hex cap fastener
- ⑮ (3) M10 washers
- ⑯ front left mount bracket
- ⑰ front right mount bracket




Tools necessary:

- ① hardware tray
- ② set of allen tools
- ③ 1/4" driver
- ④ 1/4" ratchet
- ⑤ 1/2" ratchet
- ⑥ 13mm/10mm wrench
- ⑦ 10, 12, 13, 14 and 17mm sockets
- ⑧ (1) .5 ml of thread locker




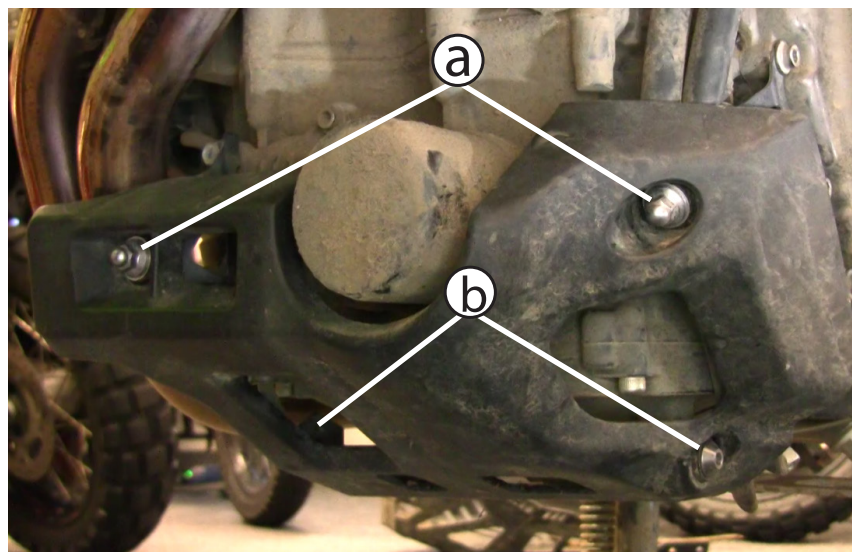


- ① (a) Using a 10mm socket, remove the (2) OEM nuts. (b) Using a 5mm allen tool, remove these (2) OEM fasteners. You will not be reusing any of these.

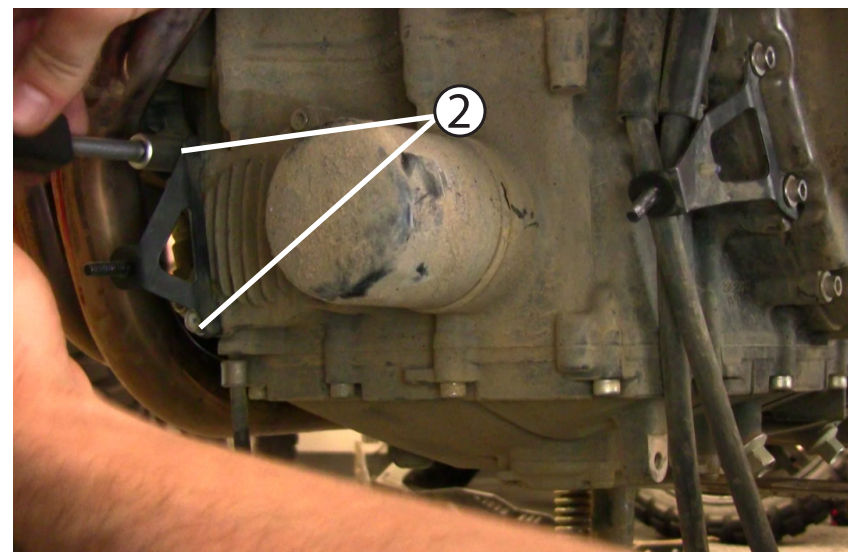


- ② Using a 10mm socket remove these (2) OEM fasteners and remove the mount bracket.

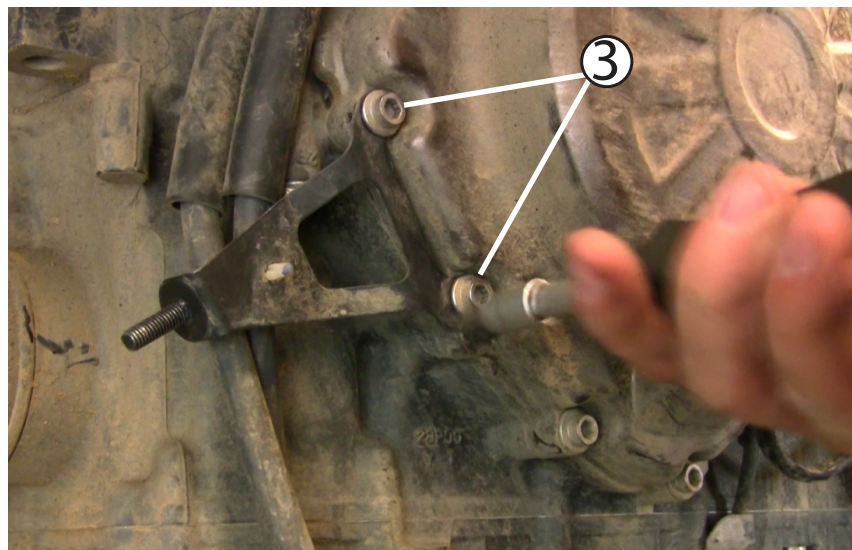


- ③ Using a 5mm allen tool, remove these (2) OEM fasteners. Remove the OEM mount bracket. Keep the (2) OEM fasteners handy, you'll be putting them right back.

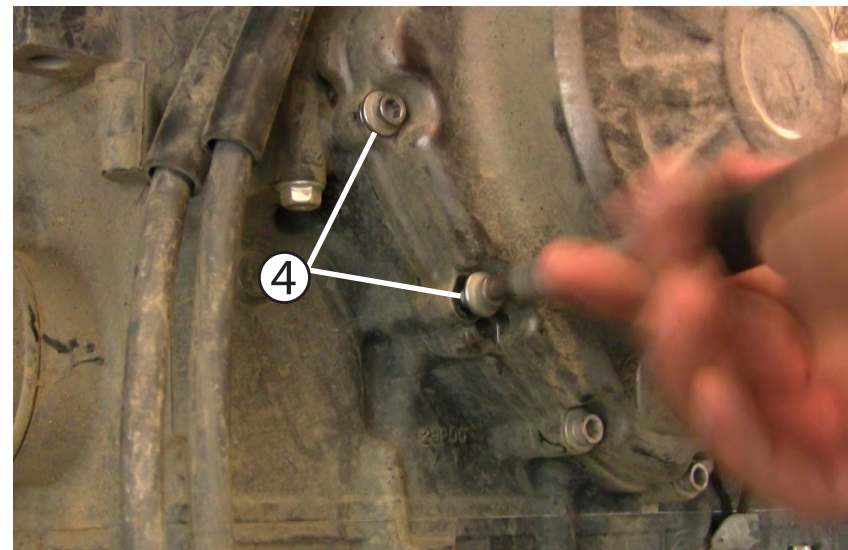


- ④ Put the (2) OEM fasteners back and tighten them down.

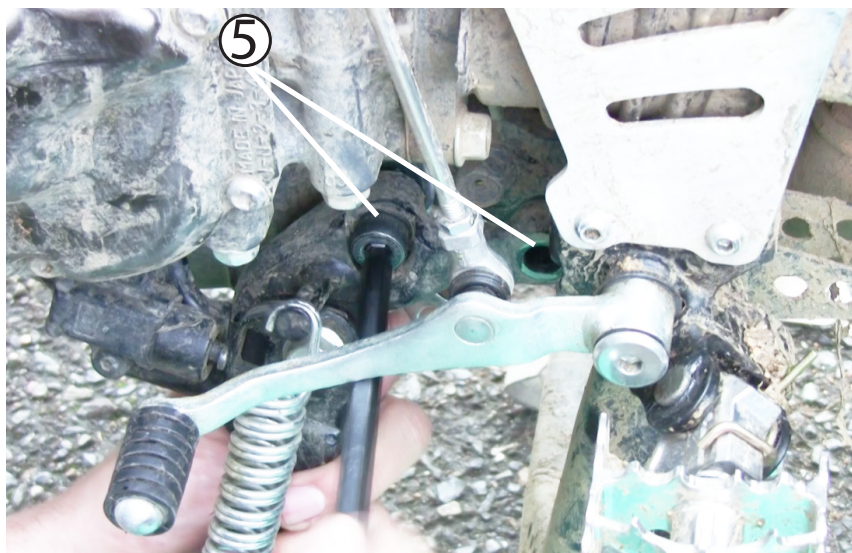


- ⑤ Using an 8mm allen tool, remove these (2) OEM fasteners. Keep them around, you will not be reusing them. When you remove the side stand, a spacer will drop out, you will not be reusing this.

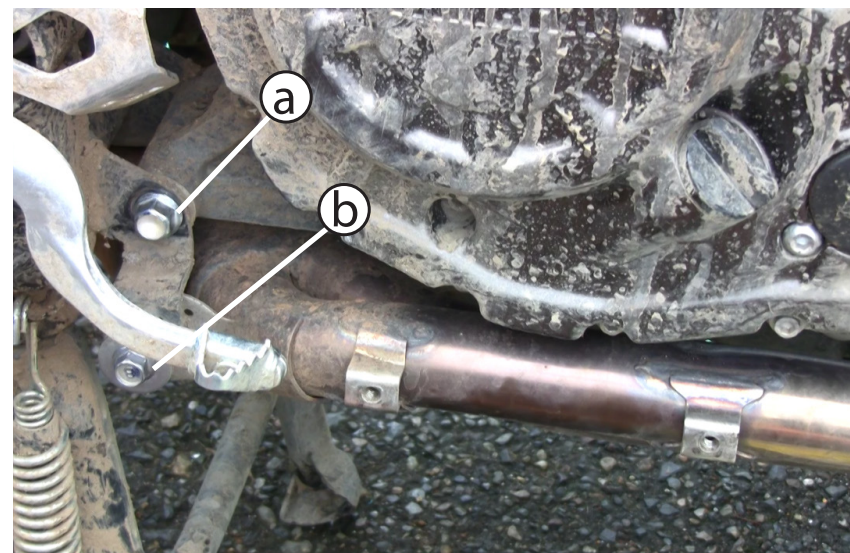


- ⑥ (a) Using a 14mm socket remove this fastener. (b) Using a 12mm socket remove this OEM fastener. You won't be reusing either of these fasteners.

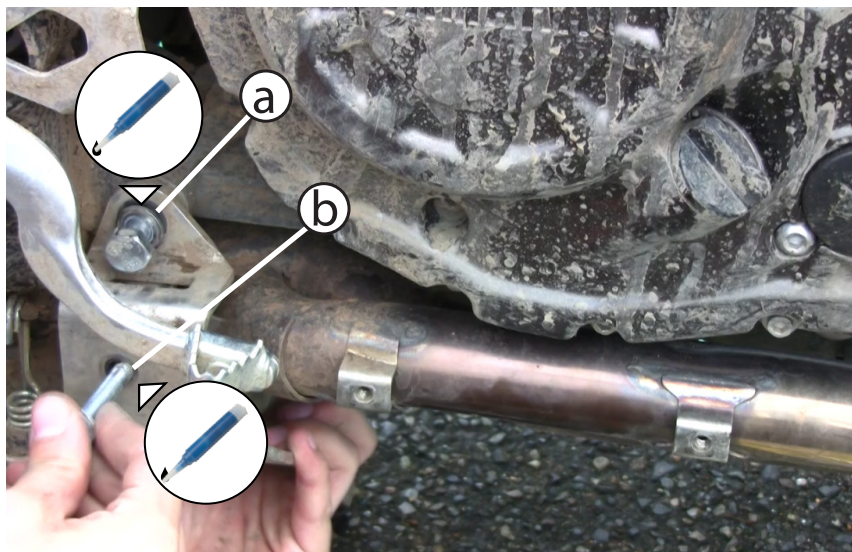


- ⑦ **Hold rear mount bracket as shown and:** (a) After applying thread locker to both fasteners, use a 17mm socket to start the M10 x 105 fastener and washer. (b) Use a 13mm socket to start the M8 x 45 fastener and washer. Do not tighten these all the way down yet.

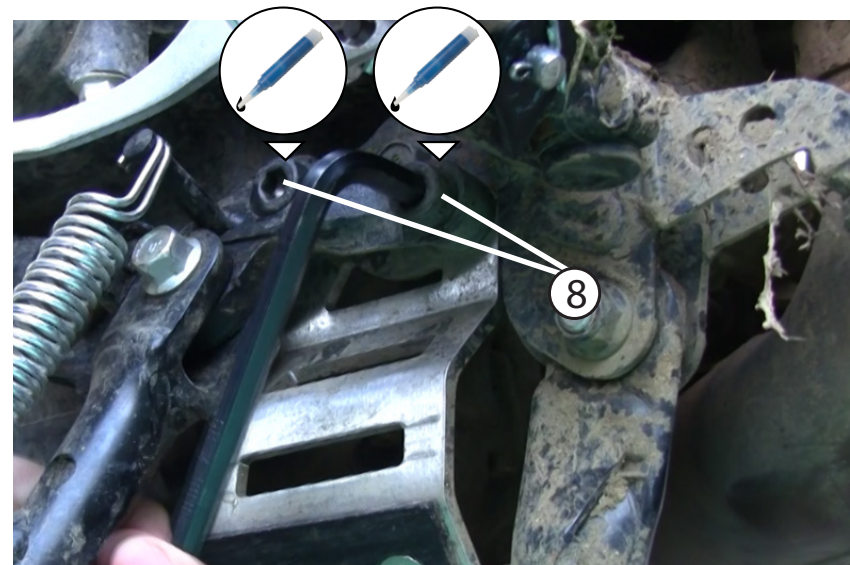


- ⑧ Put the sidestand back up to its mount holes. You no longer need the spacer that came out when you removed the OEM bolts. Apply thread locker, then using an 8mm allen tool, insert and tighten these (2) provided M10 x 40 bolts with the (2) remaining M10 washers a few turns. Do not tighten all the way down yet.

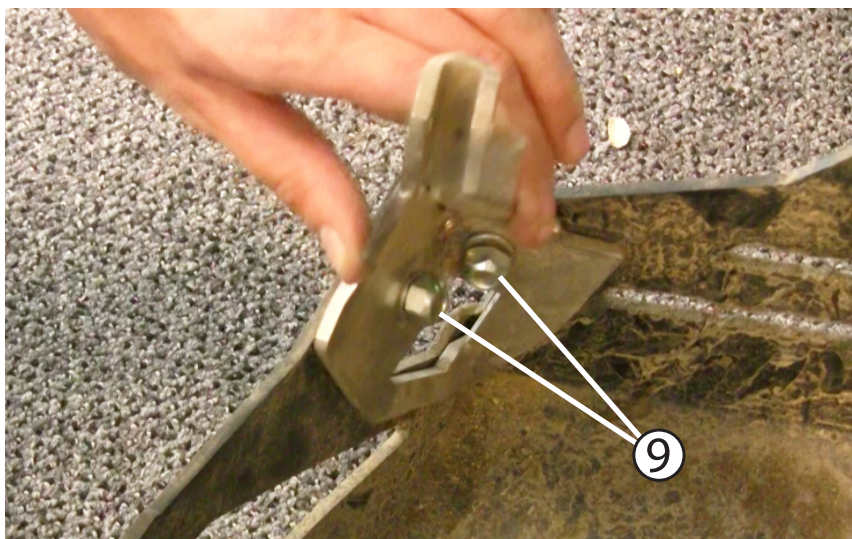


- ⑨ Line up the front left mount bracket as shown, and assemble the hardware in this order: M8 x 25 flat head fastener - finishing washer - washer - locking nut. Do not use thread locker on these fasteners. Do not tighten these down all the way yet.

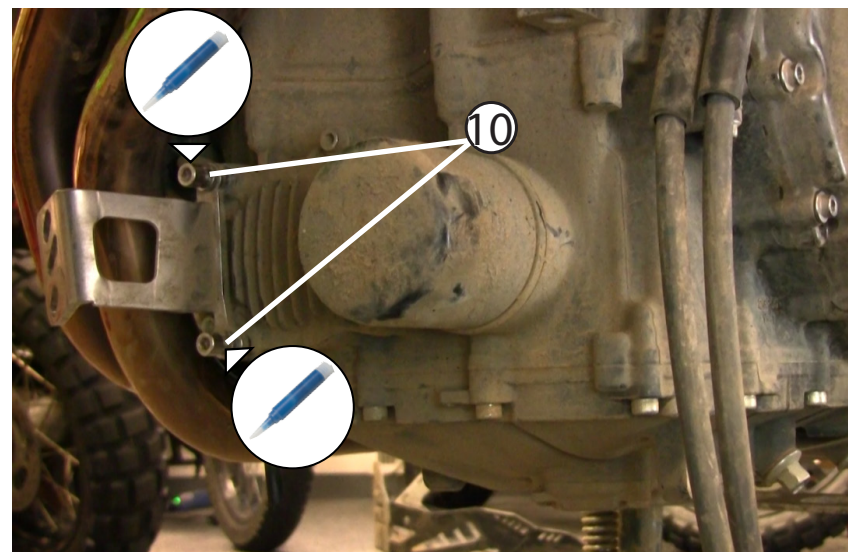


- ⑩ Line up the front right mount bracket and after applying thread locker to the (2) provided M6 x 16 socket head cap screws with washers, use a 5mm allen tool to tighten these all the way down. No need to leave these loose.

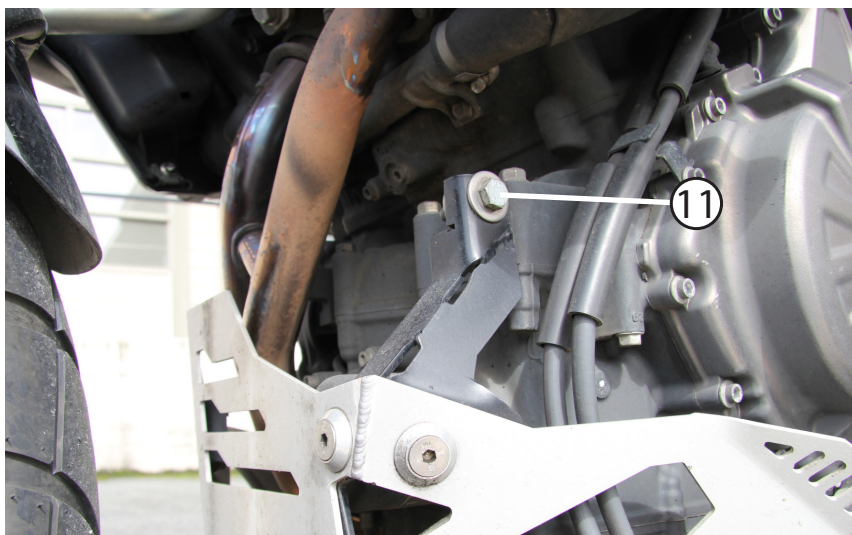

- ⑪ Holding the skidplate up, line up the front left mount bracket with the mount tab shown. Insert the provided M8 x 35 hex cap fastener with washers on each end and get the locking nut started. Do not tighten this down yet. You just want it to hold the plate in place.

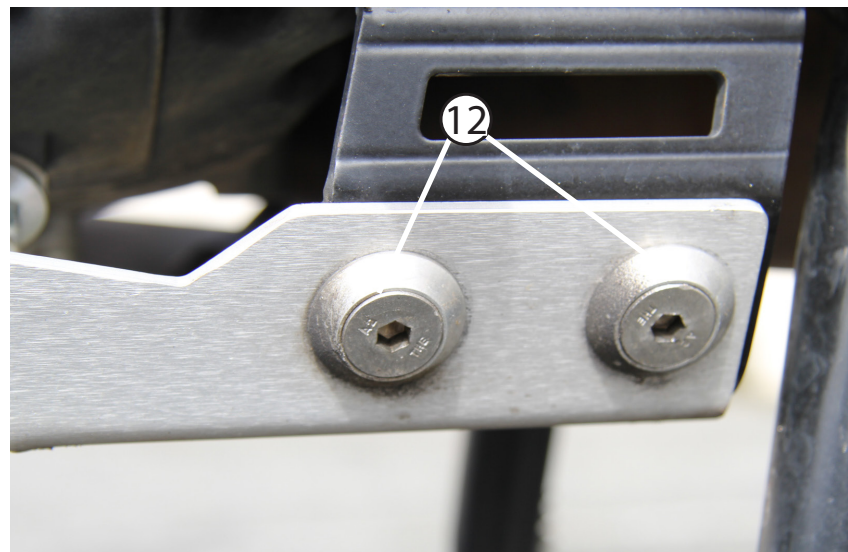


- ⑫ Insert the (2) provided M8 x 25 flat head fasteners, then finishing washers, (on the outside of the plate) then washer, then locking nut and turn them a few turns. Do not tighten these down all the way just yet.

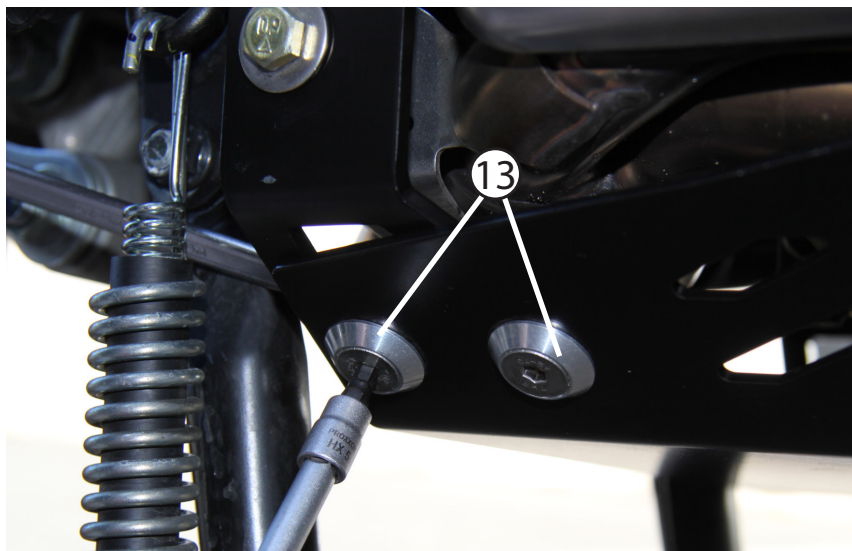


- ⑬ On the right side, insert the (2) provided M8 x 25 flat head fasteners, then finishing washer, (on the outside of the plate) then washer, then locking nut and turn them a few turns. Do not tighten these down all the way just yet.




- ⑭ Insert the (2) provided M6 x 18 flat heads, washers and locking nut and using a 10mm wrench and 4mm allen tool, start tightening these. Do not tighten them all the way down yet. We'll keep this a bit loose for now.

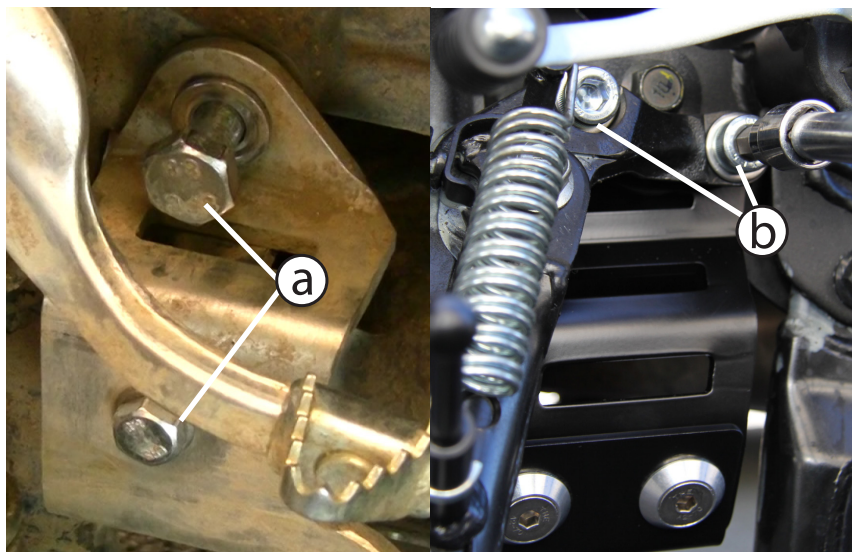


- ⑮ (a) Using a 17mm socket and 13mm socket, finish tightening these bolts down. (b) Using an 8mm allen tool, finish tightening these bolts down.

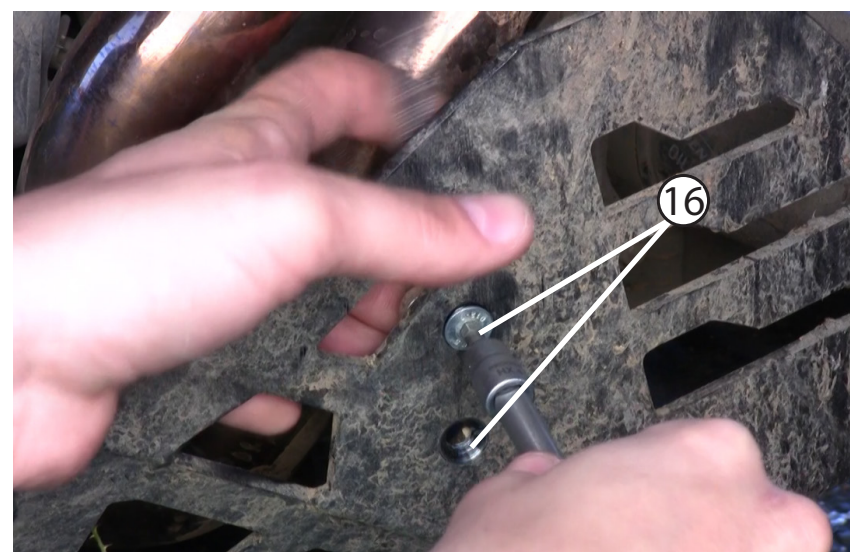

- ⑯ Now come back to the front left bracket and using a 10mm wrench and 4mm allen tool, tighten these down.

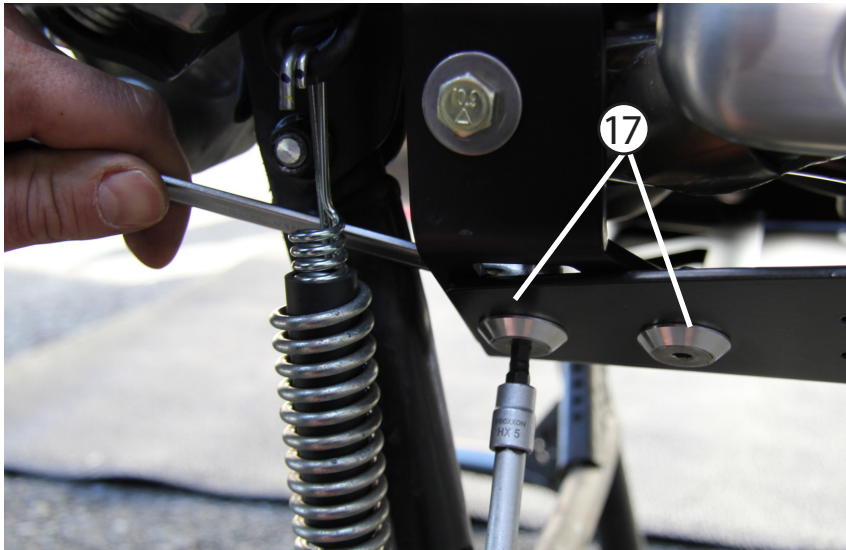

- ⑰ On the right side rear, using a 5mm allen tool and a 13mm wrench, tighten these two fasteners down. Repeat on the left side.

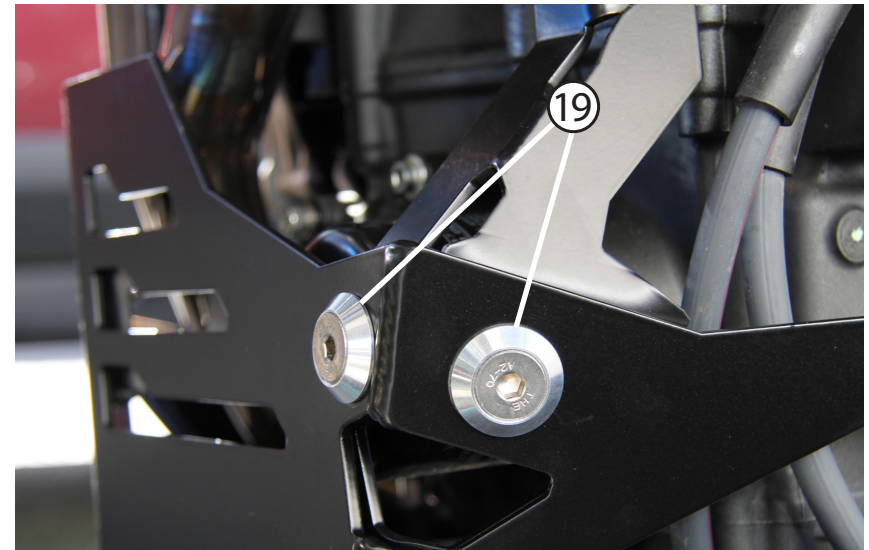

- ⑱ Using a 5mm allen tool and a 13mm wrench, tighten these two fasteners down.



- ⑳ Last, you will tighten this bolt using a 13mm socket and 13mm wrench.

CONGRATULATIONS!

You've completed your installation. If at any point you have questions about your installation or have any feed back for us, we'd love to hear it. A downloadable version of these instructions can be found at our web site. www.AltRider.com

After 5 hours or 100 miles of riding, check your newly installed equipment to ensure all hardware is secure.

Global Office:

email: info@AltRider.com
phone: +1 206-922-3618
address: 4000 Aurora Ave N
Ste 100
Seattle, WA 98103

Europe Office:

email: info@AltRider.eu
address: Oude Middenweg 231-M
2491 AG DEN HAAG
Netherlands

TERMS OF USE, WARRANTY AND LIABILITY WAIVER

AltRider LLC, a Washington company, having its principal place of business in Seattle, WA ("AltRider") offers its motorcycle accessories (the "Product") with the terms, conditions and notices as follows:

Terms of Use

This Product is offered to you conditioned upon your acceptance without modification of the terms, conditions, and notices contained herein. Installation and/or use of this product implies acceptance of all such terms, conditions, and notices. If you do not agree to these terms, do not buy the Product. If you have already bought the Product and do not agree to these terms, return this Product promptly including the packaging and all written materials, to AltRider.

Limitation of Liability and Warranty Disclaimer

You may return your merchandise for a full refund or exchange, less any original or return shipping fees under these conditions:

1. Only if the merchandise is in 100% factory condition. Original manufacturer's packaging and same condition as sold – original boxes, packaging material, instructions, documentation, parts, and attached tags.

2. Only unused, unscratched, uninstalled, undamaged merchandise will be accepted. Do not install equipment until you are sure you want to keep it. Package items carefully in protective materials before returning them. Never ship an item in its original manufacturers packaging – it will arrive damaged. Please use a postal box or other adequate packaging to ensure your return or exchange is not damaged on the way back to AltRider.com.

To read more about our exchanges and returns policy, on the web, navigate to <http://www.altrider.com/info/exchangesAndReturns>

Excepting the warranties stated in the preceding paragraph, AltRider hereby disclaims all other warranties and conditions with regard to the Product including all implied warranties and conditions of merchantability and fitness for a particular purpose. There are no warranties which extend beyond the description on the face hereof. AltRider does not warrant against damages or defects arising out of use or installation of the Product. Installation instructions are provided for your convenience. AltRider is not responsible for any damages arising out of the installation, improper or otherwise, of the Product. No warranty of any kind, expressed or implied, is made regarding the safety of this Product.

To the extent allowed by law, AltRider shall not be held liable for any direct, indirect, punitive, incidental, special or consequential damages arising out of, or connected with, the use or misuse of this Product. Buyer assumes all risks and liability arising from use of this Product.

Entire Agreement

This document states the entire obligation of AltRider with respect to the Product. If any part of this agreement is determined to be void, invalid, unenforceable or illegal, including, but not limited to the warranty disclaimers and liability limitations set forth above, then the remainder of the agreement shall remain in full force and effect.

Applicable Law

This agreement is governed by the laws of Washington, USA. You hereby consent to the exclusive jurisdiction and venue of the courts of Washington, USA, in all disputes arising out of or relating to the use of this product.

