### PRODUCT INFORMATION

Height

Width

**Depth** 

**Description** 12V DOT/ECE Reflector Headlight with

Chrome Inner Bezel 175.00 mm / 6.89 in 175.00 mm / 6.89 in 110.00 mm / 4.33 in

**Shape** Round

Polycarbonate **Outer Lens Material** 

**Outer Lens Color** Clear **Housing Material** Aluminum **Housing Color** Black **Bezel Color** Chrome

**Retrofits** Bucket 7" Round Headlights (PAR56)

**Connector or Wiring** H4

**Mating Connector** H4 AMP#172615-2 1.77 lbs / 0.8 kgs **Product Weight Shipping Weight** 2.74 lbs / 1.24 kgs


**Additional Information** Includes H-4 connector with 4th front


position wire for ECE-compliance.





### **PRODUCT DIMENSIONS**

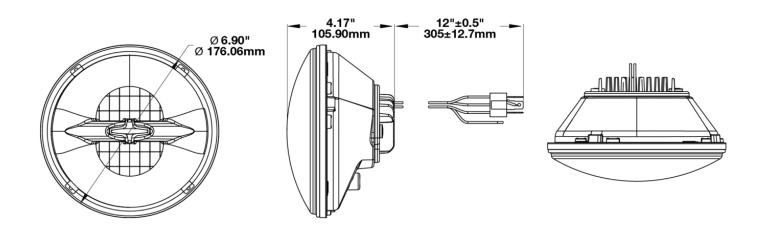



### **ELECTRICAL SPECIFICATIONS**

Input Voltage 12V DC
Operating Voltage 9-16V DC
Black Wire Ground
White Wire High Beam
Yellow Wire Low Beam
Red Wire Front Position

**Current Draw** 2.67A @ 12V DC (High Beam)

1.67A @ 12V DC (Low Beam) 0.13A @ 12V DC (Front Position)

#### REGULATORY STANDARDS COMPLIANCE



**SAE | 584** 











Buy America Standards ECE Reg 113
ECE Reg 50 Eco Friendly
FMVSS 108 Table XX IEC IP67

Tested to ECE Reg. 10 (Radiated Emissions only)

#### PHOTOMETRIC SPECIFICATIONS

**Raw Lumen Output** 1,620 (High Beam); 925 (Low Beam) 850 (High Beam); 500 (Low Beam) **Effective Lumen** 

**Output** 

41,000 (High Beam); 12,110 (Low **Candela Output** 

Beam)

**Nominal LED Color Temperature** 

5000 K


Beam Pattern(s) Forward Lighting - High Beam

(DOT/ECE)

Forward Lighting - Low Beam

(DOT/ECE)

Signalization - Front Position

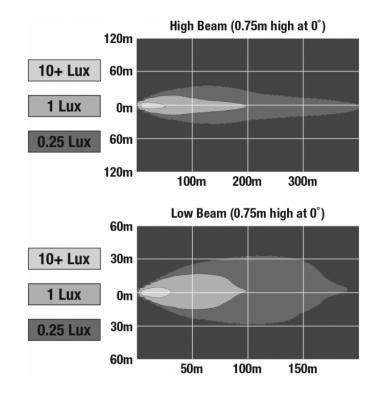

### **APPLICATIONS**





## **ACCESSORIES**



### <u>Part Number</u> <u>8200411</u>

Wire Harness H4 for 7" Round (PAR56) Headlights

